

4. Is the use currently open for business? Yes No

If the use is closed, provide the date closed. _____ / _____ / _____
month day year

5. Describe any proposed changes to the conditions of the special use permit:

6. Are the hours of operation proposed to change? Yes No

If yes, list the current hours and proposed hours:

Current Hours:

Proposed Hours:

11:30am- 2:30pm.(Mon-Sat)
Lunch Break time (2:30-5pm)
5-9:30 pm (Mon-Sat)
4-9pm (Sunday)

7. Will the number of employees remain the same? Yes No

If no, list the current number of employees and the proposed number.

Current Number of Employees:

0

Proposed Number of Employees:

7

8. Will there be any renovations or new equipment for the business? Yes No

If yes, describe the type of renovations and/or list any new equipment proposed.

Inertial & alteration for restaurant and please see the attached equipments

9. Are you proposing changes in the sales or service of alcoholic beverages? Yes No

If yes, describe proposed changes:

BEER

WINE- hot sake, cold sakes in bottle

10. Is off-street parking provided for your employees? Yes No
If yes, how many spaces, and where are they located?

11. Is off-street parking provided for your customers? _____ Yes No
If yes, how many spaces, and where are they located?

12. Is there a proposed increase in the number of seats or patrons served? Yes No
If yes, describe the current number of seats or patrons served and the proposed number of seats and patrons served. For restaurants, list the number of seats by type (i.e. bar stools, seats at tables, etc.)

Current:

Proposed:

Dining: 14 seats

Booth seat: 26 seats

Bar: 21 seats

13. Are physical changes to the structure or interior space requested? Yes No
If yes, attach drawings showing existing and proposed layouts. In both cases, include the floor area devoted to uses, i.e. storage area, customer service area, and/or office spaces.

14. Is there a proposed increase in the building area devoted to the business? Yes No
If yes, describe the existing amount of building area and the proposed amount of building area.

Current:

Proposed:

15. The applicant is the (check one) Property owner Lessee

other, please describe: _____

16. The applicant is the (check one) _____ Current business owner Prospective business owner

other, please describe: _____

17. Each application shall contain a clear and concise statement identifying the applicant, including the name and address of each person owning an interest in the applicant and the extent of such ownership interest. If the applicant, or one of such persons holding an ownership interest in the applicant is a corporation, each person owning an interest in excess of ten percent (10%) in the corporation and the extent of interest shall be identified by name and address.

For the purpose of this section, the term "ownership interest" shall include any legal or equitable interest held in the subject real estate at the time of the application. If a nonprofit corporation, the name of the registered agent must be provided.

Please provide ownership information here:

Hinata Japanese Restaurant is wholly owned by HSJY, Inc., who's address 903 N. SAINT ASAPH ST. Alexandria, VA 22314

Special Use Permits Eligible for Administrative Approval

Certain uses of land that have potentially negative impacts on surrounding properties require special use permit approval from City Council. The City Council may impose conditions on the operation of the special use in order to protect the health, safety and welfare of the surrounding area. For new uses and for intensifications or amendments of existing uses, the Planning Commission and City Council conduct public hearings and decide whether to approve the request. The Director of Planning and Zoning, however, may approve a special use permit administratively if it is only a change in ownership or a minor amendment of a previously approved special use permit.

Special Use Permit for Change of Ownership

If the existing special use permit for an operation restricts the ownership of the use, a prospective owner may not take ownership of the operation until he receives special use permit approval for the change of ownership. Pursuant to Section 11-503, the director may approve the change and transfer the special use permit to a new owner, if the following conditions apply:

- 1) The applicant is not requesting a change in the conditions of the special use permit;
- 2) there have been no substantiated violations of the special use permit conditions;
- 3) there are no changes proposed or anticipated in the operation of the use involved;
- 4) the director has concluded that no new conditions or no amendments to existing conditions are necessary; and
- 5) following notice of the application in a newspaper of general circulation in the City, no person has requested that the director forward the application to the Planning Commission or City Council.

If the application does not meet any one of the above conditions, it must be docketed for the next available Planning Commission and City Council public hearings. If the Director approves a special use permit for change in ownership, the new owner must sign an agreement stating that he/she will to continue to comply with the special use permit conditions.

Special Use Permit for Minor Amendment

Pursuant to Sections 11-509 and 11-511 of the zoning ordinance, the director may approve minor amendments to approved special use permits. Only changes that constitute no more than a minimal enlargement or extension of the special use permit or that are so insignificant they will have little or no zoning impact on the surrounding neighborhood are eligible for administrative approval. If a change will intensify the use, it requires Planning Commission and City Council approval. Changes that intensify a use include any increase in the following:

- 1) Hours of operation;
- 2) number of seats;
- 3) number of employees; visitors of customers; or
- 4) number of vehicle trips generated.

The Director may not administratively approve minor amendments if any of the following apply:


- 1) He/She has received written or oral complaints that the use is in violation of the zoning ordinance;
- 2) at the time the special use permit was approved, opposition was presented to the Planning Commission or City Council; or
- 3) new conditions or amendments to existing conditions are necessary.

Notice of the application is published in a newspaper of general circulation in the City and is sent to docket subscribers.

Approval Process

For both change in ownership and minor amendment special use permits, the approval process generally takes between four and six weeks from the time an application is submitted. During that time, staff will review the application, inspect the subject property for compliance with special use permit conditions and advertise the proposed change in the newspaper to provide an opportunity for citizens to comment on the change and, in the case of minor amendments, send notice to the Planning Commission and City Council members. If the Director determines that the Planning Commission and City Council must consider the application, he/she will docket the application for the next available Planning Commission and City Council hearings. At that time, the Director may require additional information regarding the application.

PROCESS FLOW CHART: Change of Ownership SUP

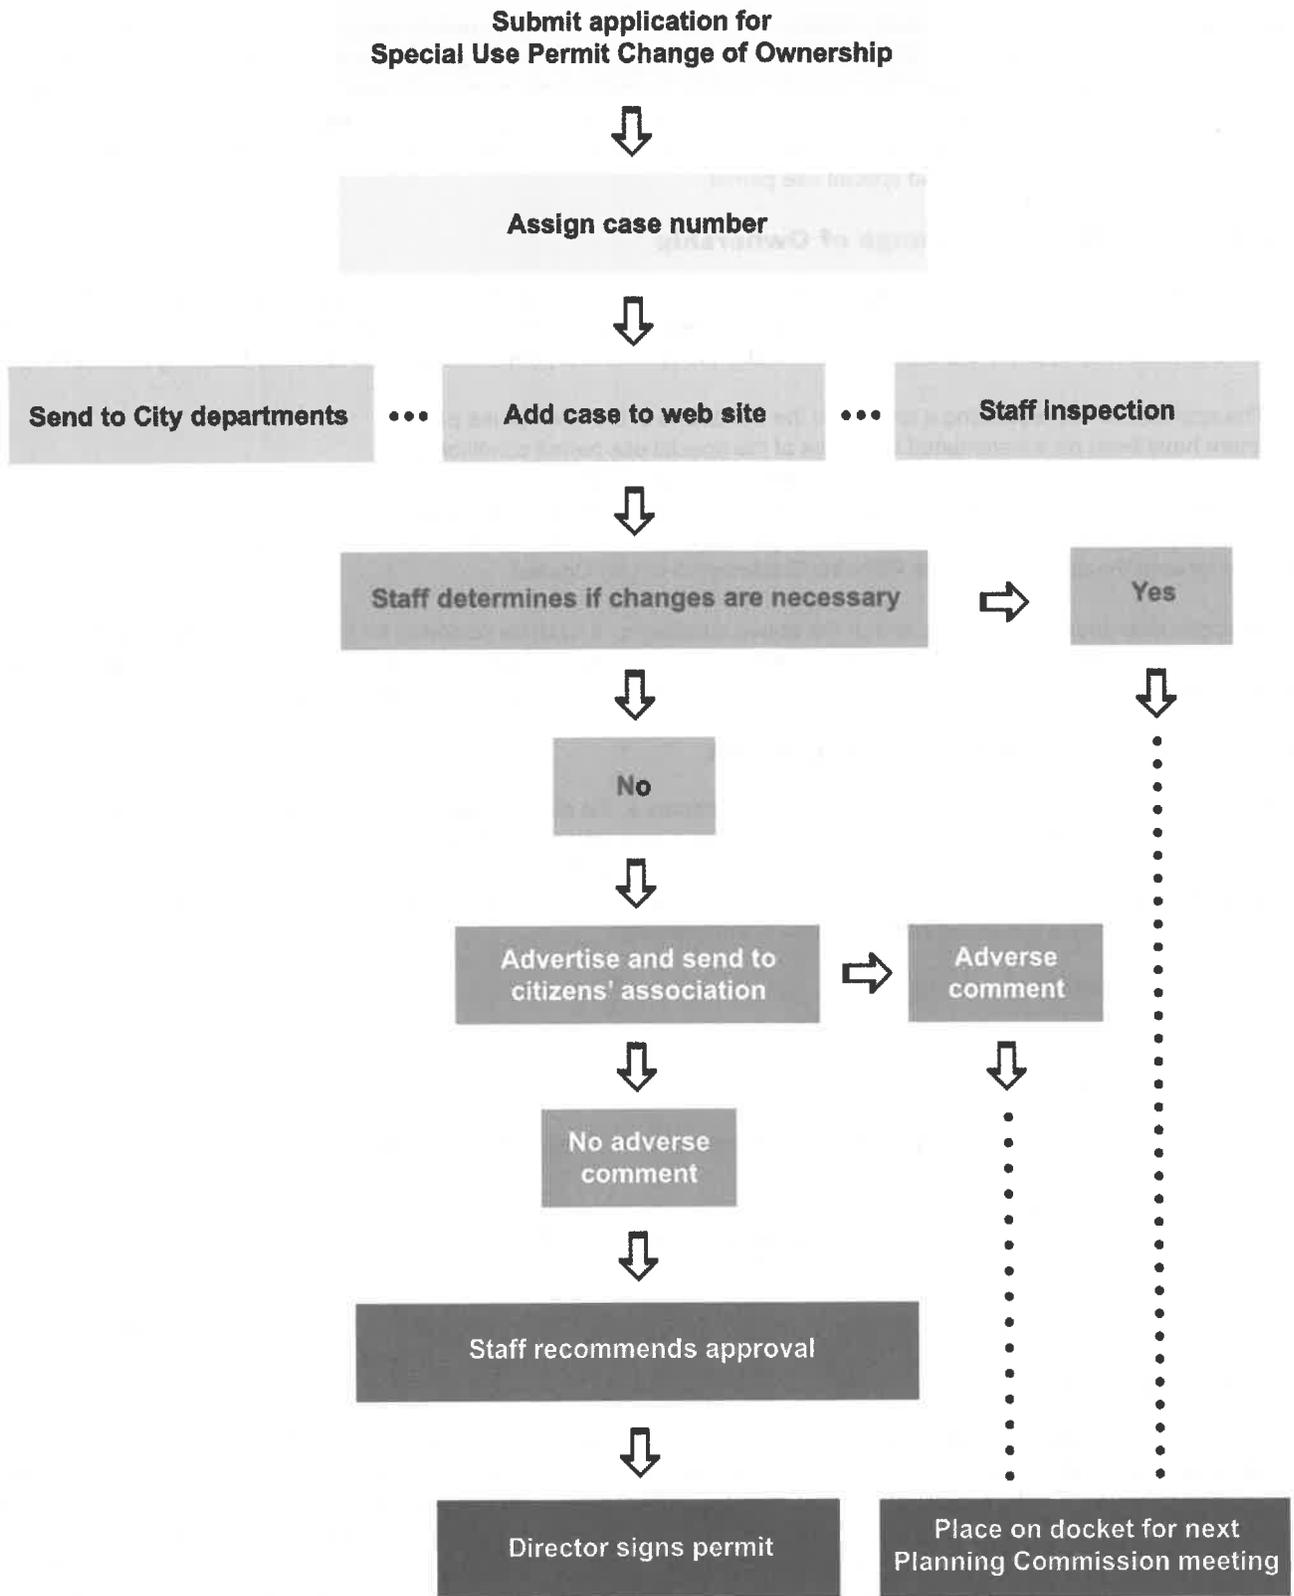



Quotation

06/18/2019

Project:

Hinata Japanese Restaurant
 903 N. Saint Asaph St.
 Alexandria, VA 22314

From:

Pinnacle Equipment Supplies Corp.
 6437-B General Green Way
 Alexandria, VA 22312
 (703)750-2260
 703-750-9773 (Fax)
 info@pinnaclesupplies.us

Project Code: 0618191

Please Note: Prices are based on the entire package being ordered; individual items purchased may be subject to a re-quote.

Please Note: Due to extreme market volatility and pending U.S. Government section 232 trade cases all prices and availability are subject to change without notice, all quotes to be confirmed at time of order.

Item	Qty	Description	Sell	Sell Total
1	1 ea	WALK-IN: IN DOOR COOLER AmeriKooler Actual Overall: 6'-11 1/2" x 12'-8" x 7'-7" (Rectangular)	\$9,800.00	\$9,800.00
	1 ea	Indoor Cooler, with Floor		
	1 ea	INTERIOR DIMENSION: 6'-3 1/2" x 12'-0" x 6'-11" (w x l x h)		
	1 ea	TEMPERATURE: 35°F		
	1 ea	INSULATION: 4" thick AK-XPS4 extruded foam with R-values of R-29 for coolers and R-32 for freezers with a 50 Year Thermal Warranty. UL Classified Core Flame Spread 15, Smoke Rating less than 165.		
	1 ea	WARRANTY: 15 Year Panel Warranty and 1 Year Parts Warranty		
	1 ea	FINISHES: Interior walls: 26 Ga. Stucco Embossed Acrylume		
	1 ea	FINISHES: Exterior walls: 26 Ga. Stucco Embossed Acrylume		
	1 ea	FINISHES: Interior ceiling: 26 Ga. Stucco Embossed Acrylume		
	1 ea	FINISHES: Exterior ceiling: 26 Ga. Stucco Embossed Acrylume		
	1 ea	FLOOR TYPE: Type 1J, Application: Foot Traffic - No Rolling Carts, NSF Floor panel rated for 850 LBS/ SQ. FT. 20 Ga. Stainless Steel Type 304 Textured Integral - Not Reinforced		
	1 ea	DOOR: (1) Standard 36" x 76" Left hinged flush door with brushed hardware. Interior & Exterior finish: 26 Ga. Stucco Embossed Acrylume. Heavy duty deadbolt handle latch. Digital LED Thermometer with pilot light switch. 1807 11w, Vapor Proof, 120V. LED fixture. 82 Lumens /watt Angled face . Requires 115vac. 1 amps.		
	1 ea	BOX: Indoor cooler		
	1 ea	EQUIPMENT: (1) 1 HP Pro3 Indoor Top Mount Self-contained Refrig. Unit, Model PTN076H6BE, 208-230/60/1, MCA 9.7 Amps, BTUH 7500, Medium Temperature, R404A, 2 years compressor and parts warranty from date of shipment within Continental USA. (1) Extended 3 year compressor Warranty for PTN076H6BE		
	1 ea	Lead time 2 week		
		** SPECIAL ORDER ITEM - NOT RETURNABLE **		
			ITEM TOTAL:	\$9,800.00

Pinnacle Equipment Supplies Corp.

06/18/2019

Merchandise	\$9,800.00
Tax 6%	\$588.00
Total	\$10,388.00

***** All price, quotation and terms are submitted without obligation and are subject to change without notice by Pinnacle Equipment Supplies Corp. *****

Acceptance of Quote / Sales Order. The prices, specifications and condition are satisfactory and hereby accepted. You are authorized to order the item as specified. It's customer's responsibility to inspect equipment for any freight damage prior to accepting delivery when shipped direct to the customer from the manufacturer / distributor or Pinnacle.

Equipment will be subject to **STORAGE FEES PER MONTH OF 2%** of equipment value if stored 90 days past the signed acceptance of quote - sales order.

FREIGHT: Please note that these are approximate freight cost and are subject to change.

TERM :

- If a credit card is used for payment over \$3000.00, a service charge of 3.5% will be assessed to the total amount.
- A 50% Deposit is required on all orders, **balance is due within 10 days** after notification by seller that the equipment is ready for delivery. Special orders require **100%** payment. 30 days payment term for credit orders, unpaid balance will be charge a **10%** late payment charge per month.
- All custom and special order items are not returnable.
- Return must be done in **5 business days** from the Quote/Sales Order date and accompanied by original sales invoice and original packaging. **Absolutely No Return after merchandise has been used.**
- Return requests are for items purchase from **Pinnacle Equipment Supplies** stock inventory only.
- All authorized return are subject to a **50%** restocking fee plus 100% freight charges.
- Cancellation are not accepted on order in transit or on custom jobs. Standard order already in process that are canceled will be subject to a **50%** restocking charge.
- Warranty merchandise are subject to factory's term and conditions. No warranty for use equipment.
- Returned check will be subject to a service fee of **\$35.00** per check. **No personal check.**
- Deposit non-returnable.

Acceptance: _____ Date: _____
Printed Name: _____

To:
Steve
678-736-0057 (Contact)
steveh.ju@gmail.com

Project:
Hinata Japanese Restaurant
903 N. Saint Asaph St.
Alexandria, VA 22314

From:
Pinnacle Equipment Supplies Corp.
6437-B General Green Way
Alexandria, VA 22312
(703)750-2260
703-750-9773 (Fax)
info@pinnaclesupplies.us

Project Code: 0523191

Please Note: Prices are based on the entire package being ordered; individual items purchased may be subject to a re- quote.

Please Note: Due to extreme market volatility and pending U.S. Government section 232 trade cases all prices and availability are subject to change without notice, all quotes to be confirmed at time of order.

Item	Qty	Description	Sell	Sell Total
2	1 ea	REFRIGERATED MERCHANDISER  Dukers Appliance Co., USA Ltd. Model No. DSM-12R Refrigerated Merchandiser, reach-in, one-section, 25"W, bottom mount self-contained refrigeration, digital control, 32°F (0°C) to 50°F (10°C) temperature range, automatic defrost, (1) hinged tempered glass door with replaceable gasket, adjustable shelves, interior & canopy LED light with switch, white interior & exterior, adjustable feet, R290 refrigerant, cETLus, ETL-Sanitation Dimensions 68(h) x 25(w) x 24(d)	\$1,120.00	\$1,120.00
	1 ea	2 year parts & labor warranty, standard		
	1 ea	5 year compressor warranty, standard		
		** SPECIAL ORDER ITEM - NOT RETURNABLE **		
			ITEM TOTAL:	\$1,120.00
3	2 ea	DISPLAY CASE, REFRIGERATED SUSHI  Hoshizaki Model No. HNC-180BA-L-SL Refrigerated Display/Sushi Case, countertop, 70-9/10"W x 13-3/5"D x 11"H, front curved glass, (4) service side glass sliding doors, (5) solid food mount plates, LED lighting, stainless steel exterior, self-contained refrigeration on left, NEMA 5-15P, cULus, NSF Dimensions 11(h) x 70.9(w) x 13.6(d)	\$3,085.00	\$6,170.00
	2 ea	Warranty: 1-Year parts & labor on entire machine		
	2 ea	Warranty: 2-Year parts & labor on compressor, evaporator & air-cooled condenser		
	2 ea	Warranty: 5-Year parts on compressor & air-cooled condenser		
	2 ea	115v/60/1-ph 1.2 amps, 100 watts, standard		
		** SPECIAL ORDER ITEM - NOT RETURNABLE **		
			ITEM TOTAL:	\$6,170.00

Item	Qty	Description	Sell	Sell Total
3	1 ea	DISPLAY CASE, REFRIGERATED SUSHI Hoshizaki Model No. HNC-150BA-R-SL Refrigerated Display/Sushi Case, countertop, 59-1/10"W x 13-3/5"D x 11"H, front curved glass, (4) service side glass sliding doors, (4) solid food mount plates, LED lighting, stainless steel exterior, self-contained refrigeration on right, NEMA 5-15P, cULus, NSF Dimensions 11(h) x 59.1(w) x 13.6(d)	\$2,760.00	\$2,760.00
	1 ea	Warranty: 1-Year parts & labor on entire machine		
	1 ea	Warranty: 2-Year parts & labor on compressor, evaporator & air-cooled condenser		
	1 ea	Warranty: 5-Year parts on compressor & air-cooled condenser		
	1 ea	115v/60/1-ph 1.0 amps, 100 watts, standard		
		** SPECIAL ORDER ITEM - NOT RETURNABLE **		
			ITEM TOTAL:	\$2,760.00
4	1 ea	ICE CUBER Hoshizaki Model No. KM-350MAJ Ice Maker, Cube-Style, 22"W, air-cooled, self-contained condenser, production capacity up to 489 lb/24 hours at 70°/50° (393 lb AHRI certified at 90°/70°), crescent cube style, stainless steel finish, R-404A refrigerant, 115v/60/1-ph, 9.05 amps, NSF, UL, ENERGY STAR® Dimensions 28(h) x 22(w) x 27.38(d)	\$2,850.00	\$2,850.00
	1 ea	Warranty: 3-Year parts & labor on entire machine		
	1 ea	Warranty: 5-Year parts & labor on evaporator		
	1 ea	Warranty: 5-Year parts on compressor & air-cooled condenser		
	1 ea	B-300PF Ice Bin, 22"W, top-hinged front-opening door, 300-lb ice storage capacity, for top-mounted ice maker, vinyl clad, painted flange legs included, protected with H-GUARD Plus Antimicrobial Agent, ETL, ETL-Sanitation	\$960.00	\$960.00
	1 ea	Warranty: 3-Year parts & labor for bin		
	1 ea	H9320-51 Water Filtration System, single configuration, 18.4" H (manifold & cartridge)	\$210.00	\$210.00
	1 ea	Warranty: 1-Year on entire water filtration system & replaceable elements, standard		
		** SPECIAL ORDER ITEM - NOT RETURNABLE **		
			ITEM TOTAL:	\$4,020.00
5	2 ea	ONE (1) COMPARTMENT SINK GSW USA Model No. SEE18181L Sink, one compartment, 39"W x 24"D x 45"H, 18-gauge stainless steel construction, 18" x 18" x 12" deep compartment, 18" drainboard on left, 11-1/2"H backsplash, 8" OC splash mount faucet holes, includes stainer with 3-5/8" dia. opening, stainless steel legs & crossbracing, NSF, ETL (Economy Line) Dimensions 45(h) x 39(w) x 24(d)	\$305.00	\$610.00
			ITEM TOTAL:	\$610.00
5a	2 ea	WALL / SPLASH MOUNT FAUCET GSW USA Model No. AA-812G Heavy Duty Faucet, 8" wall mount, 12" swivel spout, 1/2" NPT female inlets, integral spring check valves, color coded Red & Blue handles, brass construction & polished chrome body, no lead, MAX 2.2GPM @ 60PSI	\$99.00	\$198.00
			ITEM TOTAL:	\$198.00

Item	Qty	Description	Sell	Sell Total
6	3 ea	HAND SINK  GSW USA Model No. HS-1615S Hand Sink, wall mount, 12-1/2"W x 9-3/4" front-to-back x 6-5/8" deep bowl, includes no lead wall mount faucet, welded side splash guards & strainer, 20 gauge 304 polished satin stainless steel, ETL Dimensions 14.38(h) x 15.75(w) x 15.25(d)	\$140.00	\$420.00
			ITEM TOTAL:	\$420.00
7	1 ea	THREE (3) COMPARTMENT SINK  GSW USA Model No. SEE18183D Sink, three compartment, 90-1/4"W x 24"D x 45"H, 18-gauge stainless steel construction, 18" x 18" x 12" deep compartments, 18" drainboards on left & right, 11-1/2"H backsplash, 8" OC splash mount faucet holes, includes (3) strainers with 3-5/8" dia. openings, stainless steel legs & side crossbracing, NSF, ETL (Economy Line) Dimensions 45(h) x 90.25(w) x 24(d)	\$485.00	\$485.00
			ITEM TOTAL:	\$485.00
7a	1 ea	WALL / SPLASH MOUNT FAUCET  GSW USA Model No. AA-814G Heavy Duty Faucet, 8" wall mount, 14" swivel spout, 1/2" NPT female inlets, integral spring check valves, color coded Red & Blue handles, brass construction & polished chrome body, no lead, MAX 2.2GPM @ 60PSI	\$102.00	\$102.00
			ITEM TOTAL:	\$102.00
10	2 ea	GAS FLOOR FRYER  Serv-Ware Model No. SGF-40N Fryer, natural gas, floor model, 35-40 lb oil capacity, tube design with baffles, (3) 30,000 BTU tubes, easy start continuous pilot, double rod basket hanger, chromed basket with plastic coated handle, 200° - 400°F temperature range, adjustable thermostat, cold zone, 450° F Hi-limiter, 1-1/4" full-port drain, stainless steel construction & 6" adjustable legs, cETLus, ETL-Sanitation Dimensions 46.5(h) x 15.5(w) x 30.2(d)	\$625.00	\$1,250.00
	2 ea	1 year parts & labor warranty, valid in the United States, standard		
			ITEM TOTAL:	\$1,250.00
11	1 ea	RANGE, 36", 6 OPEN BURNERS  Turbo Air Model No. TAR-6 Radiance Restaurant Range, gas, 36", (6) 32,000 BTU/hr each lift-off top open burners, (1) standard oven with (1) rack, stainless steel front, sides & back riser lift-off high shelf, full stainless steel oven interior, adjustable oven thermostat, 26.3" D standard, 6" stainless steel adjustable legs standard, regulator included, total 227,000 BTU, CSA, CSA-Sanitation Dimensions 56.5(h) x 36(w) x 32(d)	\$1,450.00	\$1,450.00
	1 ea	Note: Contact factory representative for parts & accessories discounts		
	1 ea	1 year labor & parts warranty, standard		
	1 ea	Natural gas		
			ITEM TOTAL:	\$1,450.00

Initial: _____

Item	Qty	Description	Sell	Sell Total
12	1 ea	RANGE, WOK, GAS Atlanta Culinary Equipment Model No. CWR-1-13 24"L x 43"W, One chamber, stainless steel top, back, side and front panel, front drainage tunnel, water-cooled backsplash, two of S/S rear top rails, automatic swing faucet, galvanized drip pan for grease and debris collection, one stainless steel waste basket, 3/4" gas inlet , 1/2" water inlet. ETL	\$1,695.00	\$1,695.00
	1 ea	Natural gas		
	1 ea	13" Diameter wok chamber		
	1 ea	WR-JBC9 Speed Burner, with cap, 9" dia., 1/2" pipe, 130,000 BTU/HR (Natural Gas)		
	1 ea	AA-510G Wok Range Faucet, automatic, wall mount, 14" spout, 3/8" NPT male inlets, chrome plated brass construction, no lead, MAX 2.2GPM @ 60PSI (701014)		
			ITEM TOTAL:	\$1,695.00
13	1 ea	RICE / GRAIN COOKER Thunder Group Model No. RER55ASN Rice Cooker, 55 cup capacity, lift-off cover, piezo pilot ignition, flame failure safety device, 1/2" NPT female, 35,000 BTU, Natural gas, Rinnai®, NSF, CSA Star	\$440.00	\$440.00
			ITEM TOTAL:	\$440.00
13a	1 ea	EQUIPMENT STAND, FOR COUNTERTOP COOKING GSW USA Model No. ES-RC20 Rice Cooker Stand, 20" x 20" x 20-1/2"H, stainless steel top, galvanized leg, undershelf & gussets, adjustable ABS bullet feet, ships K.D., ETL Dimensions 20.5(h) x 20(w) x 20(d)	\$115.00	\$115.00
			ITEM TOTAL:	\$115.00
14	1 ea	MOP SINK BK Resources Model No. BKMS-1620-12 Mop Sink, floor mount, 20" wide x 16" front-to-back x 12" deep bowl, 3-1/2" heavy duty brass basket drain (BKDR-HD4), (3) skirted sides, 18/304 stainless steel Dimensions 17(h) x 24.5(w) x 19.38(d)	\$310.00	\$310.00
			ITEM TOTAL:	\$310.00
14a	1 ea	SERVICE FAUCET BK Resources Model No. BKSF-WB3 WorkForce Service Faucet, with vacuum breaker, splash-mounted, integral check valves, 1/4 turn ceramic valves, built-in bucket holder, garden hose threaded spout, wall bracket included	\$109.00	\$109.00
			ITEM TOTAL:	\$109.00

Initial: _____

Item	Qty	Description	Sell	Sell Total
16	3 ea	UNDERCOUNTER REFRIGERATOR Dukers Appliance Co., USA Ltd. Model No. DUC48R Undercounter Refrigerator, reach-in, two-section, 48"W, bottom mount self-contained refrigeration, digital temperature control, 33°F (0.5°C) to 41°F (5°C) temperature range, automatic defrost, (2) solid self-closing doors, (2) adjustable shelves, stainless steel interior & exterior, 5" casters (2 braked), R290 refrigerant, 1/5 HP, 110v/60/1-ph, cETLus, ETL-Sanitation Dimensions 36(h) x 48(w) x 31(d) 3 ea 3 year parts & labor warranty, standard 3 ea 5 year compressor warranty, standard ** SPECIAL ORDER ITEM - NOT RETURNABLE **	\$1,345.00	\$4,035.00
			ITEM TOTAL:	\$4,035.00
17	1 ea	REACH-IN UNDERCOUNTER FREEZER Dukers Appliance Co., USA Ltd. Model No. DUC60F Undercounter Freezer, reach-in, two-section, 60"W, bottom mount self-contained refrigeration, digital temperature control, 0°F (-18°C) to -8°F (-22°C) temperature range, automatic defrost, (2) solid self-closing doors, (2) adjustable shelves, stainless steel interior & exterior, 5" casters (2 braked), R290 refrigerant, 1/2 HP, 110v/60/1-ph, cETLus, ETL-Sanitation Dimensions 36(h) x 60(w) x 31(d) 1 ea 3 year parts & labor warranty, standard 1 ea 5 year compressor warranty, standard ** SPECIAL ORDER ITEM - NOT RETURNABLE **	\$1,840.00	\$1,840.00
			ITEM TOTAL:	\$1,840.00
19	2 ea	LOCKER GSW USA Model No. EL-6DR Employee Locker, 6-tier, 12"W x 20"D x 77"H, door pulls, grid vented, 6" adjustable legs, powder coated beige Dimensions 77(h) x 12(w) x 20(d) ** SPECIAL ORDER ITEM - NOT RETURNABLE **	\$240.00	\$480.00
			ITEM TOTAL:	\$480.00
22	1 ea	REACH-IN FREEZER Blue Air Commercial Refrigeration Model No. BSF49 D-Series Freezer, reach-in, bottom mount self-contained refrigeration, two-section, 49.0 cu. ft. capacity, digital controls, (8) shelves, door open alarm, recessed door handles, stainless steel interior & exterior, lockable full size solid door, self-closing & stay open door, 4" swivel casters (2 braked), 115v/60/1-ph, 11.8 amps, 3/4 HP, cETLus, ETL-Sanitation, ENERGY STAR® Dimensions 82.38(h) x 54(w) x 31(d) 1 ea 3 Years parts & labor, 5 year compressor warranty (in USA only), standard	\$3,355.00	\$3,355.00
			ITEM TOTAL:	\$3,355.00

Item	Qty	Description	Sell	Sell Total
24	1 ea	MICROWAVE OVEN Turbo Air Model No. TMW-1100NM Medium Duty Microwave Oven, 21.38"W x 18.13"D x 13"H, 1.0 cu. ft. capacity, stainless steel exterior, manual control, interior light, easy to clean flat interior, one touch cook function, side hinged door with tempered glass window, 1.0kW, 120v/60/1-ph, 14.0 amps, ETL-Sanitation, UL Dimensions 13(h) x 21.38(w) x 18.13(d)	\$275.00	\$275.00
	1 ea	Note: Contact factory representative for parts & accessories discounts		
	1 ea	1 year parts/labor warranty, standard		
			ITEM TOTAL:	\$275.00
26	1 ea	FOOD PAN WARMER, COUNTERTOP Thunder Group Model No. SEJ80000C Food Warmer, 3-1/2 quart well, countertop, electric, adjustable dial, stainless steel, brushed-finish, 120v/60/1-ph, 1200 watt, cETLus, NSF	\$106.00	\$106.00
			ITEM TOTAL:	\$106.00
28	2 ea	SANDWICH / SALAD PREPARATION REFRIGERATOR Dukers Appliance Co., USA Ltd. Model No. DSP48-12-S2 Sandwich/Salad Prep Table, two-section, 48"W, bottom mount self-contained refrigeration, digital temperature control, 34°F (1°C) to 47°F (8°C) temperature range, automatic defrost, (2) solid self-closing doors, (2) adjustable shelves, (12) 1/6 size pans (included), stainless steel interior & exterior, 5" casters (2 braked), R290 refrigerant, 110v/60/1-ph, cETLus, ETL-Sanitation Dimensions 45.63(h) x 48.13(w) x 31.5(d)	\$1,590.00	\$3,180.00
	2 ea	3 year parts & labor warranty, standard		
	2 ea	5 year compressor warranty, standard		
		** SPECIAL ORDER ITEM - NOT RETURNABLE **		
			ITEM TOTAL:	\$3,180.00
29	1 ea	SALAMANDER BROILER, GAS Turbo Air Model No. TASM-36 Radiance Salamander, gas, 36"W, range/wall mount or countertop, adjustable gas valve, roll-out spring balanced stainless steel grid with (4) locking positions, removable grease pan, stainless steel front, sides & interior, total 35,000 BTU, CSA, CSA-Sanitation Dimensions 19(h) x 36(w) x 20.5(d)	\$1,555.00	\$1,555.00
	1 ea	1 year labor & parts warranty, standard		
	1 ea	Natural gas		
		** SPECIAL ORDER ITEM - NOT RETURNABLE **		
			ITEM TOTAL:	\$1,555.00
			Merchandise	\$36,080.00
			Tax 6%	\$2,164.80
			Total	\$38,244.80

Prices Good Until: 06/23/2019

Initial: _____

***** All price, quotation and terms are submitted without obligation and are subject to change without notice by Pinnacle Equipment Supplies Corp. *****

Acceptance of Quote / Sales Order. The prices, specifications and condition are satisfactory and hereby accepted. You are authorized to order the item as specified. It's customer's responsibility to inspect equipment for any freight damage prior to accepting delivery when shipped direct to the customer from the manufacturer / distributor or Pinnacle.

Equipment will be subject to **STORAGE FEES PER MONTH OF 2%** of equipment value if stored 90 days past the signed acceptance of quote - sales order.

FREIGHT: Please note that these are approximate freight cost and are subject to change.

TERM :

- If a credit card is used for payment over \$3000.00, a service charge of 3.5% will be assessed to the total amount.
- A 50% Deposit is required on all orders, **balance is due within 10 days** after notification by seller that the equipment is ready for delivery. Special orders require **100%** payment. 30 days payment term for credit orders, unpaid balance will be charge a **10%** late payment charge per month.
- All custom and special order items are not returnable.
- Return must be done in **5 business days** from the Quote/Sales Order date and accompanied by original sales invoice and original packaging. **Absolutely No Return after merchandise has been used.**
- Return requests are for items purchase from **Pinnacle Equipment Supplies** stock inventory only.
- All authorized return are subject to a **50%** restocking fee plus 100% freight charges.
- Cancellation are not accepted on order in transit or on custom jobs. Standard order already in process that are canceled will be subject to a **50%** restocking charge.
- Warranty merchandise are subject to factory's term and conditions. No warranty for use equipment.
- Returned check will be subject to a service fee of **\$35.00** per check. **No personal check.**
- Deposit non-returnable.

Acceptance: _____ Date: _____
 Printed Name: _____



UPRIGHT SHOWCASE MERCHANTISER

Los Angeles Office 2460 Peck Road, City of Industry, CA 90601 (562) 568-4060 www.dukersusa.com
 New Jersey Office 4475 S Clinton Ave South Plainfield, NJ 07080 (215) 808-8239 Info@dukerusa.com

MODEL: DSM-12R

Features and Benefits

- * Mechanical temperature control features, a digital display to make monitoring interior temperature a breeze
- * 2-year parts and labor, 5-year compressor warranty
- * Auto defrost function, which ensures optimal performance day-in and day-out
- *Interior LED Lighting on the right side to always show your products at their best
- *Anti -fogging tempered glass door helps ensure a crystal clear view of the interior



Technical Specifications

Voltage/Frequency	115V/60Hz
Refrigerant	R290
Type of Defrost	Automatic
Exterior Finish	Black
Interior Finish	White
Net Weight	165 lbs
Total Capacity	11.47 cu ft
Total Current	2.1A
Climatic Category	4/5
Nema Config.	5-15P



MODEL NO	TEMPERATURE RANGE (°F)	EXTERNAL DIMENSION WXD XH (INCHES)	PACKING, CARTON WXD XH (INCHES)	DOOR	40GP CONTAINER CERTIFICATION
----------	------------------------	------------------------------------	---------------------------------	------	------------------------------

DSM-12R	32°F ~ 50°F	24 3/4" X 26" X 68 1/8"	27 3/8" X 27 1/8" X 71 1/8"	1	51
---------	-------------	-------------------------	-----------------------------	---	----

UPRIGHT SHOWCASE MERCHANDISER

MODEL: DSM-12R

Model:	DSM-12R
Rated Voltage:	115V AC
Rated Frequency:	60Hz
Total Input Power:	235W
Total Current:	2.1A
Total Capacity:	11.47 cu ft
Refrigerant:	R290/2.64oz
Climatic Category:	4/5
Protection Type	I
Design pressure	High Side :300PSIG Low Side:150PSIG
Insulation Blowing Gas	C-pentane
Net Weight:	165 lbs
NEMA Config	5-15P

STANDARD FEATURES

BOTTOM MOUNT COMPRESSOR

The bottom mount compressor structure is placed in the coolest possible area, provides quick and easy service R-Series

HIGH QUALITY STEEL

Interior and exterior high quality steel minimizes dents, scratches and rust

HIGH DENSITY POLYURETHANE INSULATION CFC

free and high density cell foam is Eco-friendly and more energy efficient

STURDY, CLEAN STAINLESS SHELVEING

High quality coated stainless shelves may prevent peel and rust,

SELF-CLOSING DOOR SYSTEM

Door Automatically close at 60°

MERCHANDISER HOLDS 32 °F - 50 °F FOR BEST IN MERCHANDISER




NEMA 5-15P


115/60/1

PLAN VIEW

FRONT VIEW

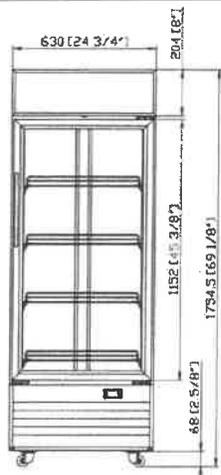

SIDE VIEW

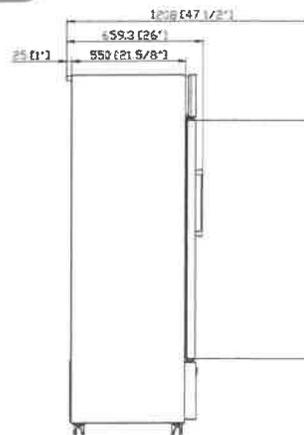

AQ AutoQuotes



New Jersey Office
4475 S. Clinton Ave,
South Plainfield, NJ 07080
(215) 808-8239
Info@dukersusa.com

Los Angeles Office
2460 Peck Road,
City of Industry, CA 90601
(562) 568-4060
Info@dukersusa.com



HNC Series

Stainless Steel Countertop Refrigerated Display Case with LED Lights



Item #: _____
Project: _____
Qty: _____
AIA#: _____



W x D x H

HNC-120BA-R(L)-SL
47.2" x 13.6" x 11"


HNC-150BA-R(L)-SL
59.1" x 13.6" x 11"

HNC-180BA-R(L)-SL
70.9" x 13.6" x 11"

HNC-210BA-R(L)-SL
82.7" x 13.6" x 11"

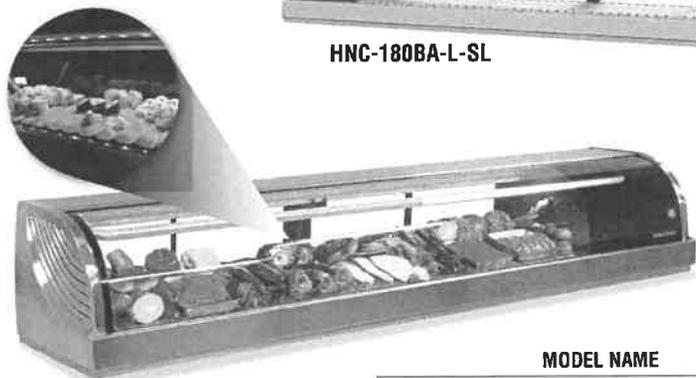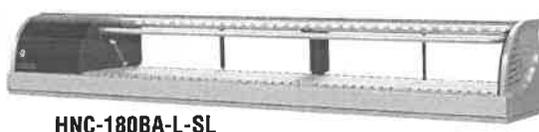

MODEL NAME

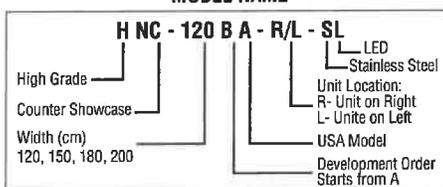

Features

- ▶ LED lights create a perfectly illuminated display
- ▶ Elegant curved front glass design enhances product on display
- ▶ Condenser airflow comes in the back and out the side

- Large diameter 1 inch drains at front
- NSF approved thermometer
- Ceiling easier to clean
- Plate space on top of unit, 5.6 inches
- Larger front to back interior, 11 inches
- Interior floor has a radius at all four sides
- Self-contained refrigeration unit - easy to install
- Large diameter upper evaporator with tin plating
- Slightly taller doors with plastic seal at end, opposite of the handle
- Solid food plates with radius groove to fit sushi foods
- R-134a Refrigerant

Refrigerated Display Case - Not for overnight storage

Warranty:

1 Year Parts & Labor on entire unit. 2 Year Parts & Labor on compressor, evaporator, air-cooled condenser. 5 Year Parts on Compressor; air-cooled condenser. Valid in United States, Canada, Puerto Rico and U.S. Territories. Contact factory for warranty in other countries.

Condenser	Model	Interior Dimensions W x D x H	Net Capacity	Accessories Included (pieces)				Number of Rear Doors	Amperage	Voltage	Refrigerant Charge Amount	Shipping Weight	Shipping Dimensions W x D x H
				Food Mounts	Plug	Vinyl Hose	Joint						
Air	HNC-120BA-L(R)-SL	33.3" x 11.3" x 6.2"	1.48ft ³	3	4	1	2	2	Rated: 1A Starting: 15A	115V/60/1	3.8 oz/110 g	104 lbs.	51.2" x 16.9" x 20.4"
Air	HNC-150BA-L(R)-SL	45.1" x 11.3" x 6.2"	2.01ft ³	4	4	1	2	4	Rated: 1A Starting: 15A	115V/60/1	4.6 oz/130 g	126 lbs.	63" x 16.9" x 20.4"
Air	HNC-180BA-L(R)-SL	56.9" x 11.3" x 6.2"	2.54ft ³	5	4	1	2	4	Rated: 1.2A Starting: 15A	115V/60/1	5.6 oz/160 g	139 lbs.	74.8" x 16.9" x 20.4"
Air	HNC-210BA-L(R)-SL	68.7" x 11.3" x 6.2"	3.07ft ³	6	4	1	2	4	Rated: 1.2A Starting: 15A	115V/60/1	6.3 oz/180 g	157 lbs.	86.6" x 16.9" x 20.4"

Food Mounts

When food temperature is too low



For more intensive cooling



Operating Limits

- Ambient Temp Range 50°F - 80°F*
Approx. 39°F*
- Saturation Temp
- Voltage Variation ± 10% (Rated voltage)
- Refrigeration System Convection cooling
- Electrical Consumption 100W (HNC-120 and HNC-150)
130W (HNC-180 and HNC-210)
- Power Supply Capacity 0.47kVA (4.1A)

Service

- Allow 6" (15 cm) clearance between the condenser air inlet/outlet and the wall or other equipment for proper air circulation. The rear of the showcase should have enough space for a smooth operation of the power switch and for easy access to the louver and air filter. Open space is required at the top of the showcase.

Showcase Construction

- Exterior: Clear glass, ABS plastic, PVC plastic, Stainless Steel
- Interior: Clear glass, ABS plastic, Stainless Steel




HNC Series


Stainless Steel Countertop Refrigerated Display Case with LED Lights




Front View

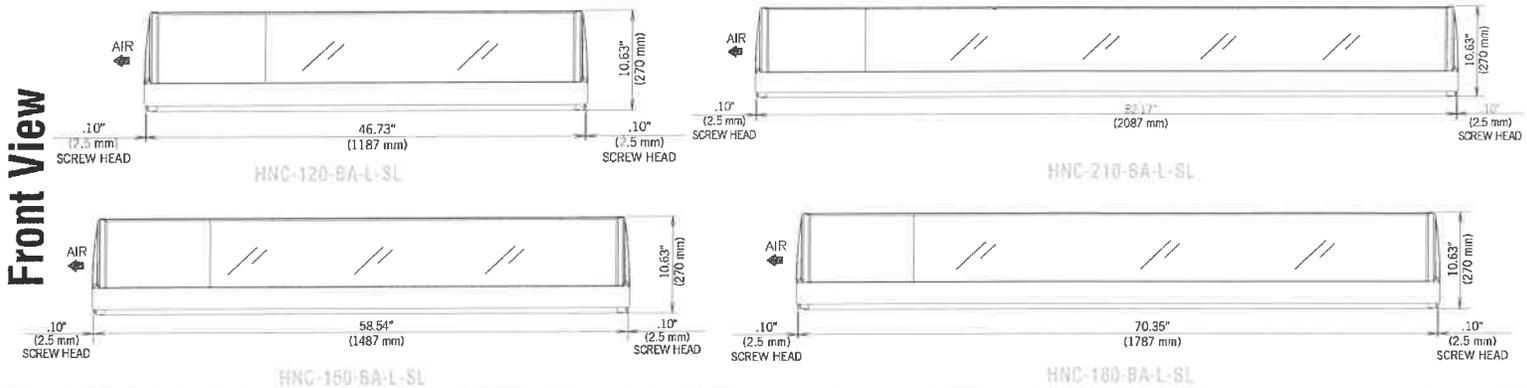



Rear View

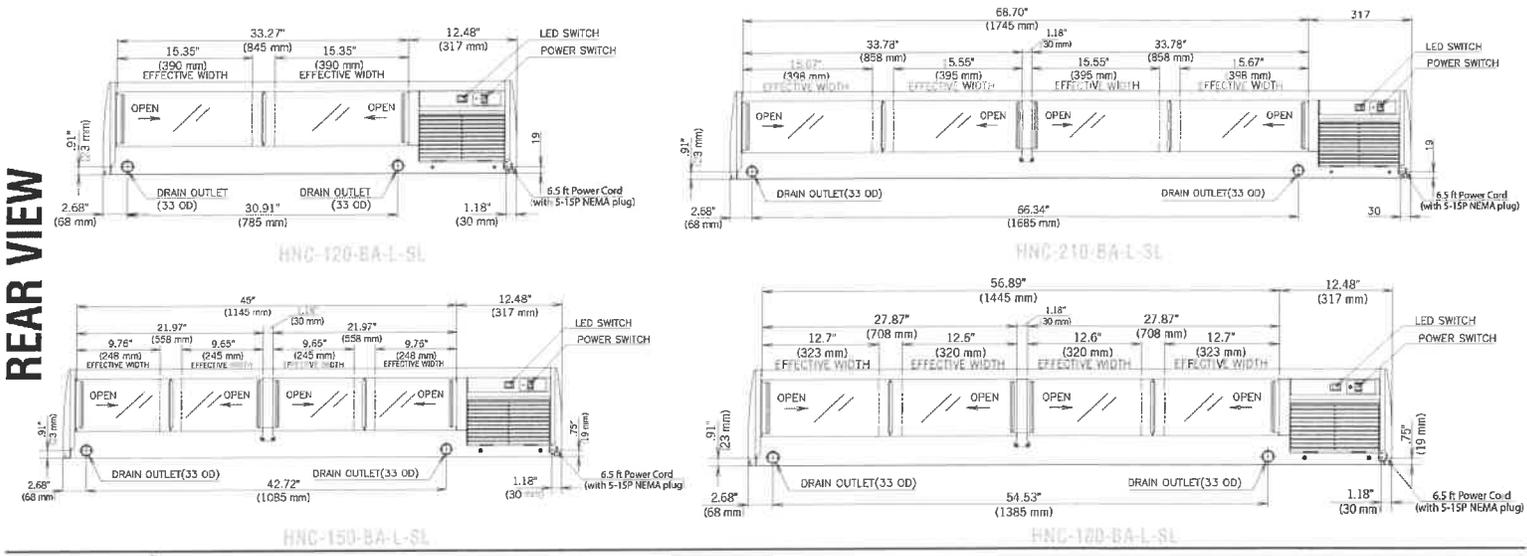

Plan View

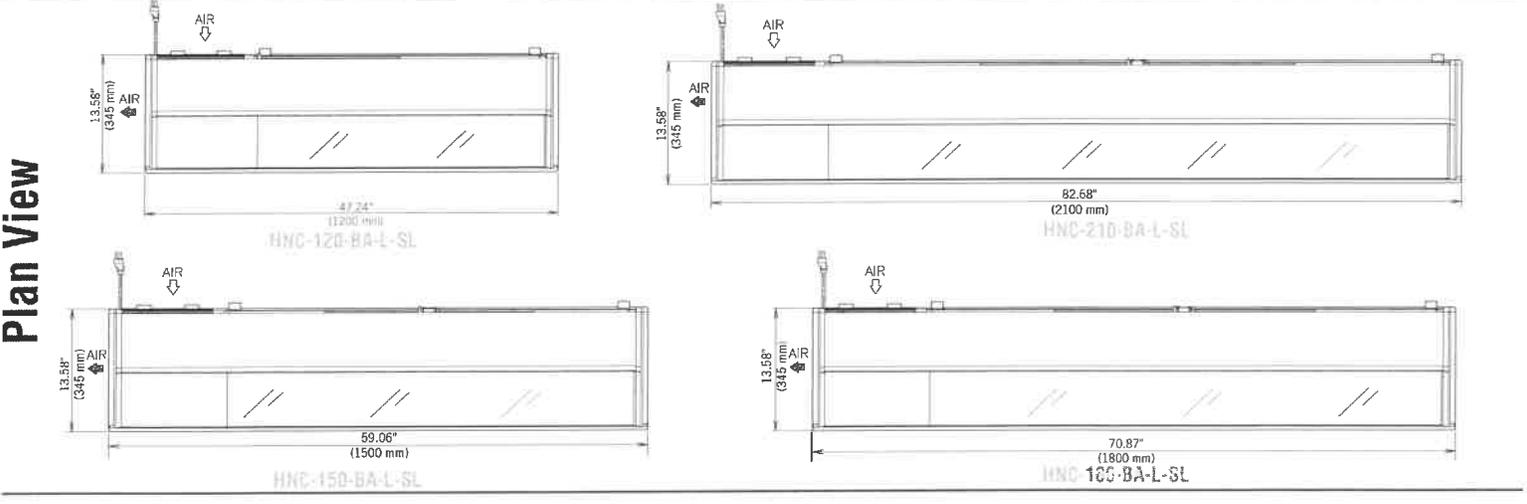

Side View

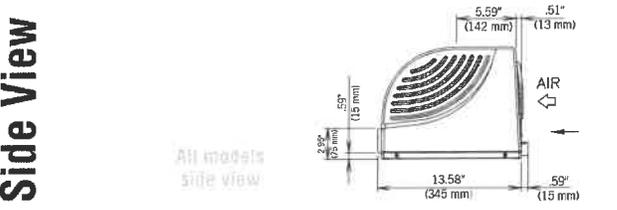

All models side view



HNC Series

Stainless Steel Countertop Refrigerated Display Case with LED Lights



Item #: _____
Project: _____
Qty: _____
AIA#: _____




W x D x H

HNC-120BA-R(L)-SL
47.2" x 13.6" x 11"

HNC-150BA-R(L)-SL
59.1" x 13.6" x 11"

HNC-180BA-R(L)-SL
70.9" x 13.6" x 11"

HNC-210BA-R(L)-SL
82.7" x 13.6" x 11"

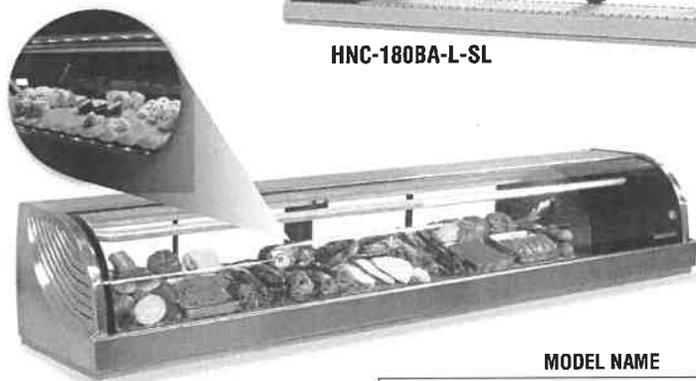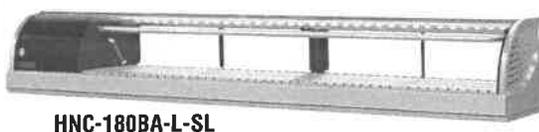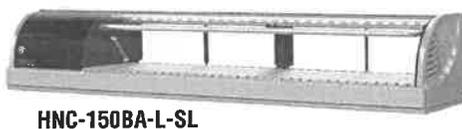

Features

- ▶ LED lights create a perfectly illuminated display
- ▶ Elegant curved front glass design enhances product on display
- ▶ Condenser airflow comes in the back and out the side


- Large diameter 1 inch drains at front
- NSF approved thermometer
- Ceiling easier to clean
- Plate space on top of unit, 5.6 inches
- Larger front to back interior, 11 inches
- Interior floor has a radius at all four sides
- Self-contained refrigeration unit - easy to install
- Large diameter upper evaporator with tin plating
- Slightly taller doors with plastic seal at end, opposite of the handle
- Solid food plates with radius groove to fit sushi foods
- R-134a Refrigerant

Refrigerated Display Case - Not for overnight storage

Warranty:

1 Year Parts & Labor on entire unit. 2 Year Parts & Labor on compressor, evaporator, air-cooled condenser. 5 Year Parts on Compressor; air-cooled condenser. Valid in United States, Canada, Puerto Rico and U.S. Territories. Contact factory for warranty in other countries.


MODEL NAME

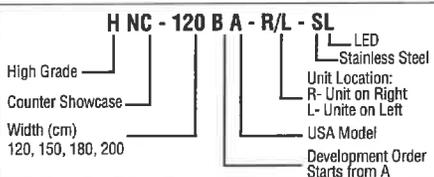


Condenser	Model	Interior Dimensions W x D x H	Net Capacity	Accessories Included (pieces)				Number of Rear Doors	Amperage	Voltage	Refrigerant Charge Amount	Shipping Weight	Shipping Dimensions W x D x H
				Food Mounts	Plug	Vinyl Hose	Joint						
Air	HNC-120BA-L(R)-SL	33.3" x 11.3" x 6.2"	1.48ft ³	3	4	1	2	2	Rated: 1A Starting: 15A	115V/60/1	3.8 oz/110 g	104 lbs.	51.2" x 16.9" x 20.4"
Air	HNC-150BA-L(R)-SL	45.1" x 11.3" x 6.2"	2.01ft ³	4	4	1	2	4	Rated: 1A Starting: 15A	115V/60/1	4.6 oz/130 g	126 lbs.	63" x 16.9" x 20.4"
Air	HNC-180BA-L(R)-SL	56.9" x 11.3" x 6.2"	2.54ft ³	5	4	1	2	4	Rated: 1.2A Starting: 15A	115V/60/1	5.6 oz/160 g	139 lbs.	74.8" x 16.9" x 20.4"
Air	HNC-210BA-L(R)-SL	68.7" x 11.3" x 6.2"	3.07ft ³	6	4	1	2	4	Rated: 1.2A Starting: 15A	115V/60/1	6.3 oz/180 g	157 lbs.	86.6" x 16.9" x 20.4"

Food Mounts

When food temperature is too low



For more intensive cooling



Operating Limits

- Ambient Temp Range 50°F - 80°F*
Approx. 39°F*
- Saturation Temp *(Ambient Temp. 80°F, No Load)
- Voltage Variation ± 10% (Rated voltage)
- Refrigeration System Convection cooling
- Electrical Consumption 100W (HNC-120 and HNC-150)
130W (HNC-180 and HNC-210)
- Power Supply Capacity 0.47kVA (4.1A)

Service

- Allow 6" (15 cm) clearance between the condenser air inlet/outlet and the wall or other equipment for proper air circulation. The rear of the showcase should have enough space for a smooth operation of the power switch and for easy access to the louver and air filter. Open space is required at the top of the showcase.

Showcase Construction

- Exterior: Clear glass, ABS plastic, PVC plastic, Stainless Steel
- Interior: Clear glass, ABS plastic, Stainless Steel




HNC Series


Stainless Steel Countertop Refrigerated Display Case with LED Lights




Front View

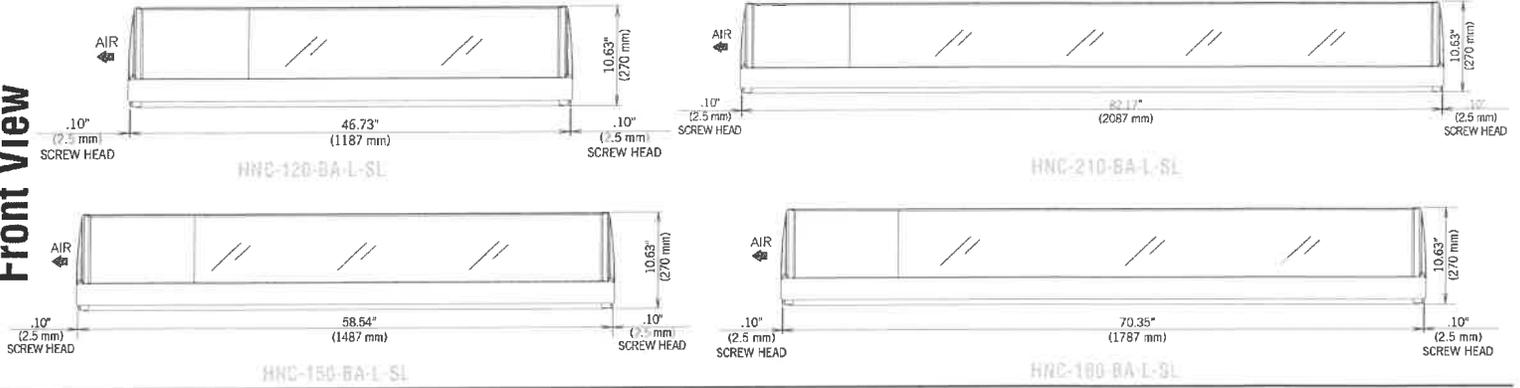


REAR VIEW

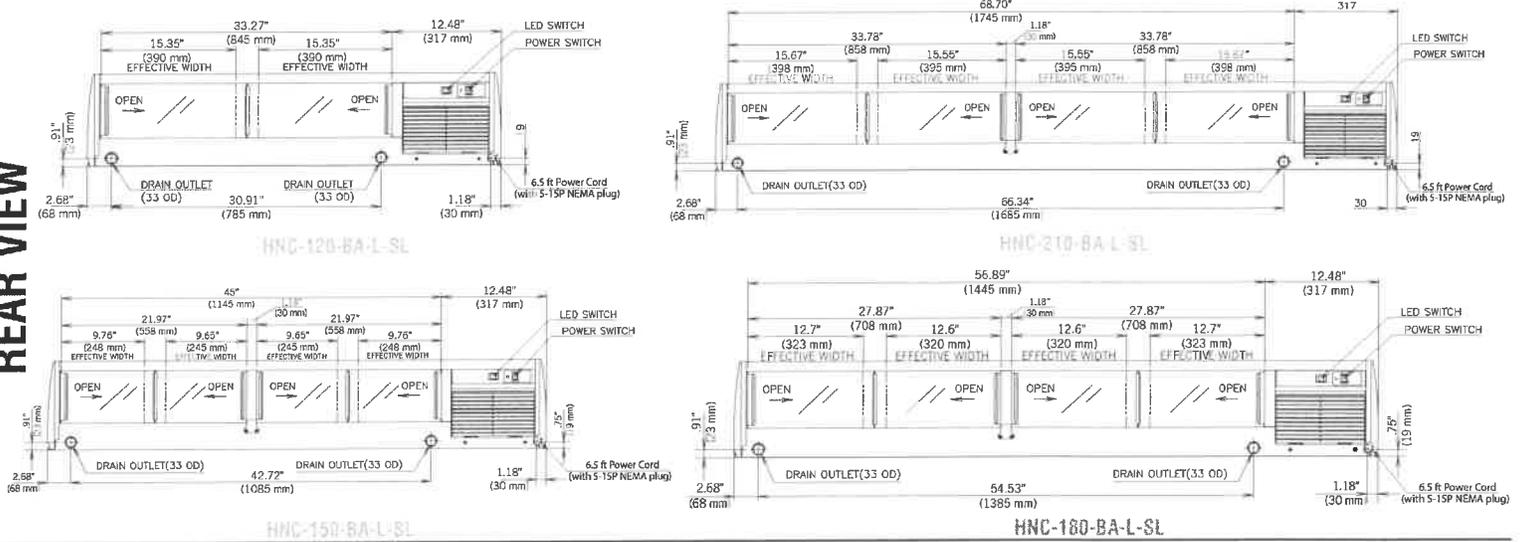

Plan View

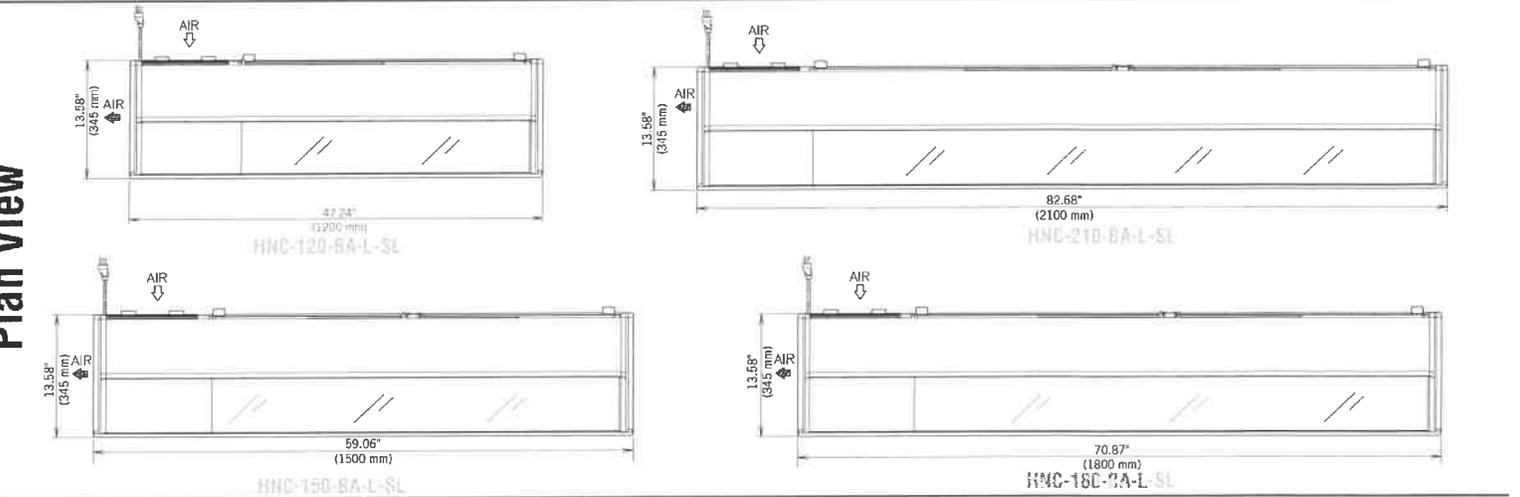

Side View

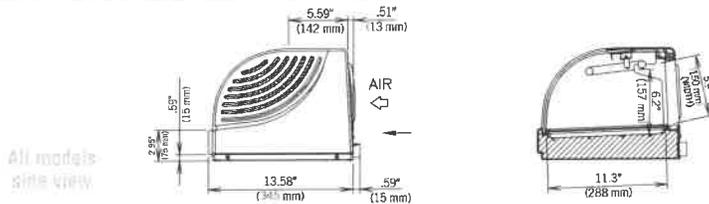



KM-350/520/660M_J



KM-350/520/660M_J

12/05/18

Item # 13260

SLIM-LINE MODULAR CRESCENT CUBER

W x D x H
22" x 27^{3/8}" x 28"

KM|EDGE X ICE MACHINE SERIES

Air-Cooled

- KM-350MAJ ☆
- KM-520MAJ ☆
- KM-660MAJ

Air-cooled model shown on optional bin: B-300



Water-Cooled

- KM-350MWJ
- KM-520MWJ
- KM-660MWJ

Remote Air-Cooled

- KM-520MRJ ☆
- KM-660MRJ

Available on Bins/Dispensers:

- B-250PF B-700PF/SF B-1150SS DB-200H
- B-300PF/SF B-800PF/SF B-1300SS DM-200B
- B-500PF/SF B-900PF/SF DB-130H

Top kit may be required. See bin spec sheets.



Item #: _____
Project: _____
Qty: _____
AIA#: _____

Features

- ▶ Individual crescent cube
- ▶ Factory-installed ultrasonic bin control can be adjusted on site
- ▶ Simple, one-hour cleaning process 
- Durable construction with fewer parts
- Self-diagnostic programming automatically adjusts to changing conditions
- Snap fit parts for easy cleaning
- Stainless steel double-sided evaporator
- CycleSaver™ design 
- Protected by H-GUARD Plus Antimicrobial Agent 
- EverCheck™ alert system 
- Removable air filters (air-cooled model only)
- R-404A Refrigerant

Warranty

3 Year Parts & Labor on entire machine 5 Year Parts & Labor on evaporator
5 Year Parts on Compressor; air-cooled condenser coil
Valid in United States, Canada, Puerto Rico and U.S. Territories. Contact factory for warranty in other countries.

Shipping (L x W x H) 33" x 25.25" X 34" Weight 16.39ft³

Condenser	Model	ICE PRODUCTION		WATER USAGE		ELECTRICAL					Heat Rejection BTU/hr.	Refrigerant Charge Amount	Net / Ship Weight (lbs.)
		Air / Water Temp Lbs. per 24 hours 70°/ 50°F 90°/ 70°F	Potable Gal. per 100 lbs. 90°/ 70°F	Condenser Gal. per 100 lbs. 90°/ 70°F	kWh Used per 100 lbs. 90°/ 70°F	Min. Circuit Amp - Max. Fuse/Breaker	Amperage	Voltage	Circuit Wires (including ground)				
Air	KM-350MAJ	489	393	14.5	N/A	5.42	15A	9.05A	115V/60/1	3	5,700	1 lb. 3.4 oz.	125 / 145
Water	KM-350MWJ	414	383	15.5	109	4.90	15A	7.5A	115V/60/1	3	6,600	11.6 oz.	126 / 146
Air	KM-520MAJ	556	480	14.7	N/A	4.68	20A	10.6A	115V/60/1	3	6,600	1 lb. 10.8 oz.	131 / 175
Water	KM-520MWJ	474	444	14.8	75	4.65	20A	8.45A	115V/60/1	3	6,300	12.7 oz.	127 / 173
Remote	KM-520MRJ	547	495	13.6	N/A	4.80	20A	12.05A	115V/60/1	3	6,200	2 lb. 4.7 oz. 4 lb. 2.7 oz.†	122 / 170
Air	KM-660MAJ	665	617	14.8	N/A	5.12	20A	15.2A	115V/60/1	3	8,000	1 lb. 9.8 oz.	131 / 151
Water	KM-660MWJ	669	668	16.1	152	4.28	20A	12.35A	115V/60/1	3	8,900	15.2 oz.	130 / 146
Remote	KM-660MRJ	646	602	14.7	N/A	5.60	20A	16.1A	115V/60/1	3	8,100	2 lb. 4.7 oz. 4 lb. 2.7 oz.†	122 / 142

† (with condenser)

Power cord not included. Must be hard-wired at site.

Hoshizaki reserves the right to change specifications without notice.




KM-350/520/660M_J



SLIM-LINE MODULAR CRESCENT CUBER

KM Edge Cube Dimensions†

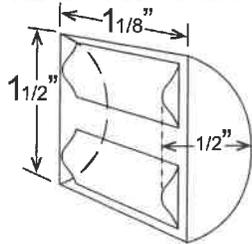

† approximate size in inches, image not to scale

Operating Limits

- Ambient Temp Range 45 - 100°F
- Water Temp Range 45 - 90°F
- Water Pressure 10 - 113 PSIG
- Voltage Range 104 - 127V

Service

- Panels easily removed and all components accessible for service.
- Removable/cleanable air filters. (Air-cooled model only)
- Allow 6" (15 cm) clearance at rear, sides, and top for proper air circulation and ease of maintenance/service.


Plumbing

- Icemaker water supply line: minimum 1/4" nominal ID copper water tubing or equivalent
- Icemaker drain line: minimum 3/4" nominal ID hard pipe or equivalent **Water-Cooled Model (Lines Must Be Independent of Icemaker)**
- Condenser water supply line: minimum 1/4" nominal ID copper water tubing or equivalent
- Condenser drain/return line: minimum 1/4" nominal ID hard pipe (open drain system) or copper water tubing (closed loop system) or equivalent


Water Filter

Please refer to water filter specification sheet for recommendations.


FRONT VIEW

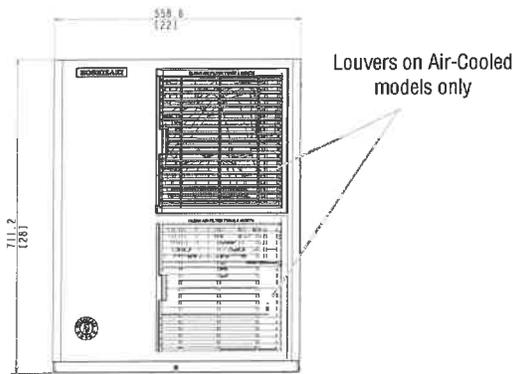


SIDE VIEW

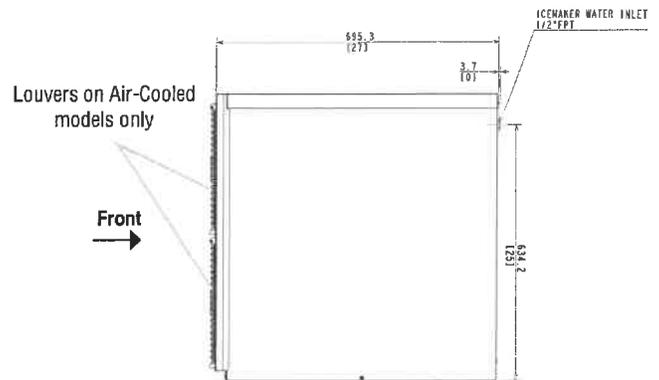


REAR VIEW

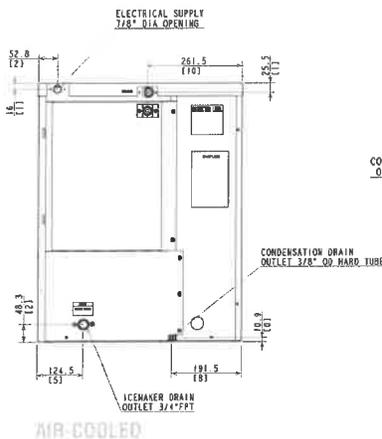

AIR-COOLED

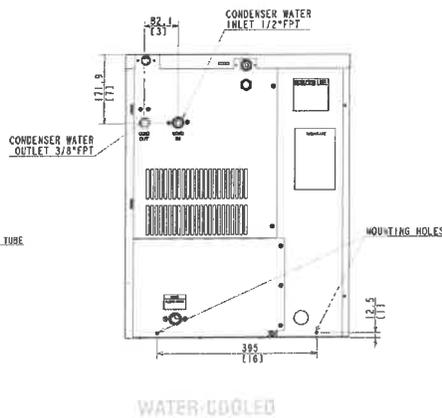


WATER-COOLED

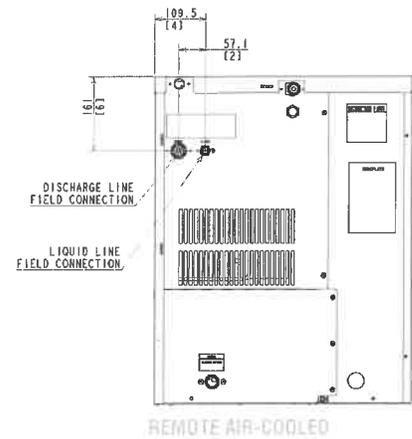


REMOTE AIR-COOLED

BOTTOM VIEW

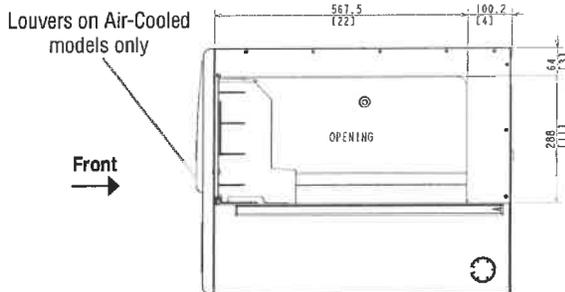

URC-SF Remote Condenser (Sold Separately)
(W x D x H) 21 13/16 x 14 1/16 x 32 13/16

For Use with KM-520MRJ and KM-660MRJ

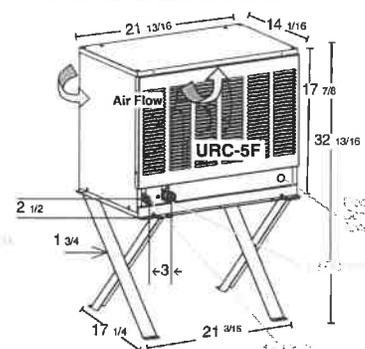

Pre-Charged Tubing Kit (Sold Separately)
20' R404-2046-2
35' R404-3546-2

Standard design for the URC Remote Condenser is based on the 1/2" x 3/8" ID. For additional models, see 13260.




PF/SF Bins

ICE STORAGE BIN SERIES



Item #: _____
 Project: _____
 Qty: _____
 AIA#: _____

PF - PVC Coated Galvanized Steel Finish
 SF - Stainless Steel Finish

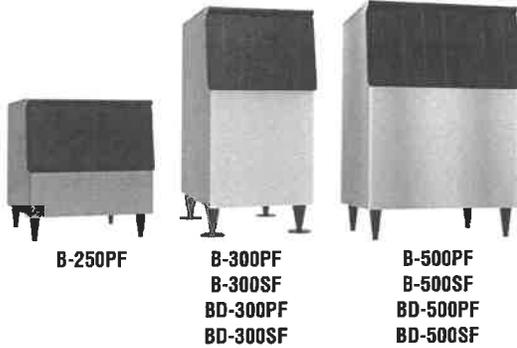

Features

- ▶ Protected by H-GUARD Plus Antimicrobial Agent
- ▶ Polyethylene bin liner for sanitary storage
- ▶ Sturdy construction for side-by-side or stacked ice machine installation

- Ice storage capacity from 250 lbs. up to 900 lbs.
- Both surfaces are designed for easy cleaning
- Long lasting attractive appearance
- Foamed-in-place polyurethane insulation, in all bin walls and bottom, provides dependable ice storage
- H-GUARD Plus Antimicrobial adds extra protection to the ice scoop (included)

BD Bins

- Fit 24" - 24 1/2" deep ice machine without top kit extension

Warranty:

2 Year Parts & Labor (Production prior to January 2012)
 3 Year Parts & Labor (Production January 2012 and after)
 Valid in United States, Canada, Puerto Rico and U.S. Territories. Contact factory for warranty in other countries.



Model Number	Exterior Dimensions W x D x H*	Application Storage Capacity†	Cubic Volume	Interior Dimensions W x D x H	Shipping Weight
B-250PF	30" x 32.3" x 33.4"	250 lbs.	10.30 ft ³	27" x 27.7" x 23.7"	130 lbs.
B(D)-300PF/SF	22" x 32.3" x 46"	300 lbs.	11.51 ft ³	19" x 27.7" x 37.6"	135 lbs.
B(D)-500PF/SF	30" x 32.3" x 46"	500 lbs.	16.33 ft ³	27" x 27.7" x 37.6"	155 lbs.
B-700PF/SF	44" x 32.3" x 46"	700 lbs.	24.77 ft ³	41" x 27.7" x 37.6"	200 lbs.
B-800PF/SF	48" x 32.3" x 46"	800 lbs.	26.90 ft ³	45" x 27.7" x 37.6"	210 lbs.
B-900PF/SF	52" x 32.3" x 46"	900 lbs.	29.59 ft ³	49" x 27.7" x 37.6"	220 lbs.

*Height includes 6" legs

† Capacity based on volume x 30 lb/ft³ average density of ice.



PF/SF Bins

ICE STORAGE BIN SERIES



Ice Machine Model Application

	22" Width	22" Width	30" Width	30" Width	44" Width	44" Width	48" Width
	KM-340M KM-515M KM-600M KM-650M F-450M F-801M F-1002M	KMD-410M† KMS-822M† FD-650M-C† FD-1002M-C†	KM-901M KM-1340M KM-1601M KML Series F-1501M F-2001	KMD-460M† KMD-530M† KMD-860M† KMS-1402M* KMS-2000M*	2 KM-340M 2 KM-515M 2 KM-600M 2 KM-650M IM-500S 2 F-450M 2 F-801M 2 F-1002M	2 KMD-410M 2 KMS-822M 2 FD-650M-C 2 FD-1002M-C	KM-1301S KM-1400S KM-1601S KM-1900S KM-2100S KM-2500S
Bins B-300PF/SF	—	N/A	N/A	N/A	N/A	N/A	N/A
Bins B-250PF B-500PF/SF	NEED HS-2033	NEED HS-2033 & HS-2129	—	NEED HS-2129	N/A	N/A	N/A
Bins B-700PF/SF	NEED HS-2035	NEED HS-2035 & HS-2130	NEED HS-2034	NEED HS-2034 & HS-2130	—	NEED HS-2130	N/A
Bins B-800PF/SF	NEED HS-2035 & HS-2032	NEED HS-2035 & HS-2032/ 2131	NEED HS-2034 & HS-2032	NEED HS-2131 & HS-2034/2032	NEED HS-2032	NEED HS-2032 & HS-2131	—
Bins B-900PF/SF	NEED HS-2035 & HS-2033	NEED HS-2035 & HS-2033/ HS-2132	NEED HS-2035	NEED HS-2132 & HS-2035	NEED HS-2033	NEED HS-2033 & HS-2132	NEED HS-2032

— No top kit necessary | N/A Combination of ice maker and bin is not possible

BD Bins fit 24" - 24 1/2" deep ice machine without Top Kit extension.

†BD-300PF/SF: KMD-410M, KMS-822M, FD-650M-C, FD-1002M-C





†BD-500PF/SF: KMD-460M, KMD-530, KMD-860

* Any KMS or FD on bin need Top Kit Extension (excludes KMS-830MLH):

- HS-2129 - for use with B-500 bins
- HS-2131 - for use with B-800 bins
- HS-2130 - for use with B-700 bins
- HS-2132 - for use with B-900 bins

Top Kits:

- HS-2032 - 4" ABS Top Kit
- HS-2033 - 8" ABS Top Kit
- HS-2034 - 14" ABS Top Kit
- HS-2035 - 22" ABS Top Kit
- HS-2036 - (2) 4" ABS Top Kits
- HS-2111 - 11.3" x 26.2" Stainless Cover/Separator
- HS-2148 - 30" x 3.1" Stainless Cover
- HS-2160 - 2 KM-901M

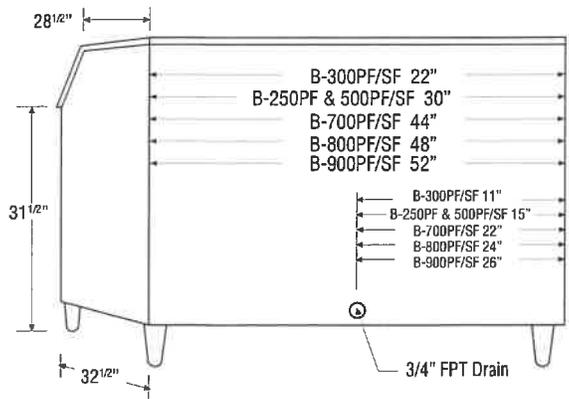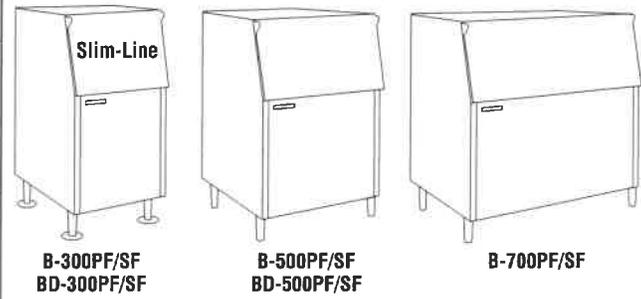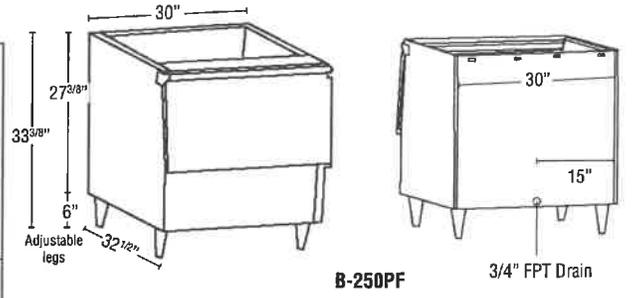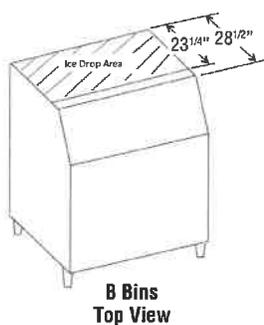



WATER FILTERS

FILTRATION SYSTEMS



Item #: _____
Project: _____
Qty: _____
AIA#: _____

H9320 FILTER

Single, Double, Triple

*height includes manifold and cartridge



Single Configuration
18.4" H*



Double Configuration
19.11" H*



Triple Configuration
19.15" H*

- Keep ice makers functioning at full capacity
- 93.7% average reduction of chlorine from incoming water supply, eliminating tastes and odors of the ice
- Filters are rated as one (1) micron nominal producing crystal clear ice
- Decrease machine maintenance by reducing lime scale build-up

HOSHIZAKI H9320 FILTER

Available in single, double and triple configurations. Rated NSF Class 1, STD 42, for taste, odor and chlorine reduction and for mechanical filtration (95.6% removal of particles one (1) micron and larger in size.)

The H9320 Filters and their respective cartridges have been tested and listed by NSF only for the functions listed above. Check for compliance with state and local laws and regulations. Do not use where the water is microbiologically unsafe, or with waters of unknown quality without adequate disinfection before or after the unit. The H9320 filter can be used with water that may contain filterable cysts.




The H9320 System is tested and certified by NSF International against NSF/ANSI Standard 42 for the reduction of:

- | | |
|--|-----------------------------|
| Std. No. 42 - Aesthetic effects | |
| Aesthetic Effects | Mechanical Filtration |
| Bacteriostatic Effects | Nominal Particulate Class 1 |
| Chemical Reduction | |
| Taste & Odor | |
| Chlorine | |

E-10 PREFILTER (9795-80)

E-20 PREFILTER (9795-90)

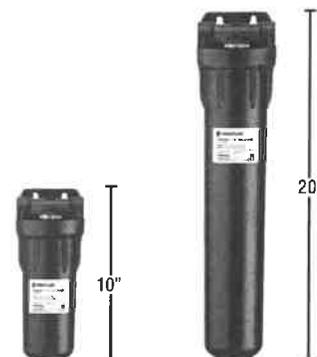

E-10 PREFILTER (9795-80)
Recommended for single configuration

E-20 PREFILTER (9795-90)
Recommended for twin and triple configuration

E-10 and E-20 Prefilters can be used for ice. Everpure prefilters are designed to increase the life of Hoshizaki 4HC-H water filters in areas with an unusual amount of dirt in the water. With a 10 micron (nominal) rating, the economical Everpure prefilter traps much of the dirt which contributes to scale buildup in ice makers, and clogs the delicate orifices of other water-using equipment.

When you install an Everpure prefilter, the Hoshizaki 4HC-H water filters can concentrate on what they do best: remove particles one (1) micron nominal and larger in size.

Replacement Cartridges:

E-10 Prefilters: 12 pack (9534-12)
40 pack (9534-40)

E-20 Prefilters: 6 pack (9534-26)
20 pack (9534-20)



Warranty:

One Year replaceable elements*
One Year the entire system

* Warranty applies to material defects in materials & workmanship only.

Hoshizaki reserves the right to change specifications without notice.



WATER FILTERS

FILTRATION SYSTEMS



WATER FILTERS
04/03/19
Item # 13076

Model Number	Description Flow Rate (Gal. per min.)	Undercounter KMs	KM Cubers	IM Cubers	Cubelets & Flakers	DCM/DBs
H9320-51	Single (2 GPM)	AM-50 KM-80 KM-115 KM-160 KM-230 KM-300	KM-350, 520, 660 KML-325, 500, 700 KMD-410, 460, 530 KMS-830 DKM-500	IM-200, 500	All Models	All Models
H9320-52	Twin 2 x (2 GPM)	N/A	KM-901, 1100 KMD-860 KMS-822, 1122, 1402	N/A	N/A	N/A
H9320-53	Triple 3 x (2 GPM)	N/A	KM-1301, 1340, 1601, 1900, 2200, 2600 KMH-2100 KMS-2000	N/A	N/A	N/A
H9655-11	Replacement Cartridge (1) One each					

Recommended water filter configurations based on average ice machine usage and regular filter replacement. If your operation has challenging water conditions or higher usage, then it may be necessary to use an additional filter or prefilter.




GSW®



SANITATION LISTED
3176427
Conforms to **NSF**
STD 2 & STD 4

SEE18181L

Economy One Tub Sink w/Left Drain Board

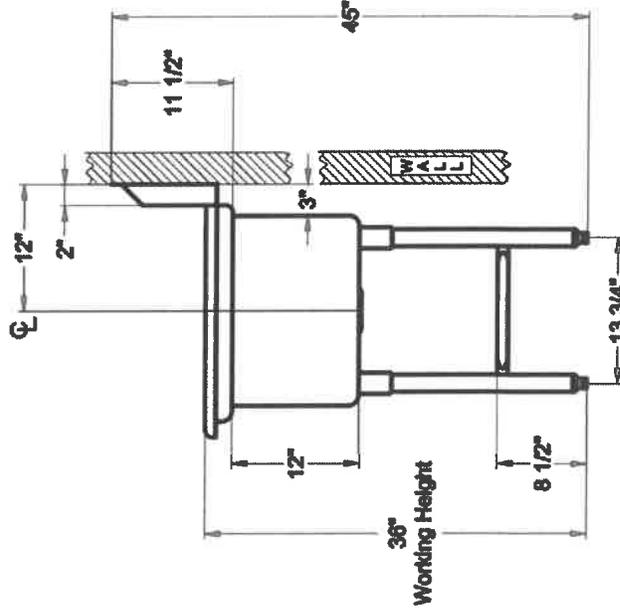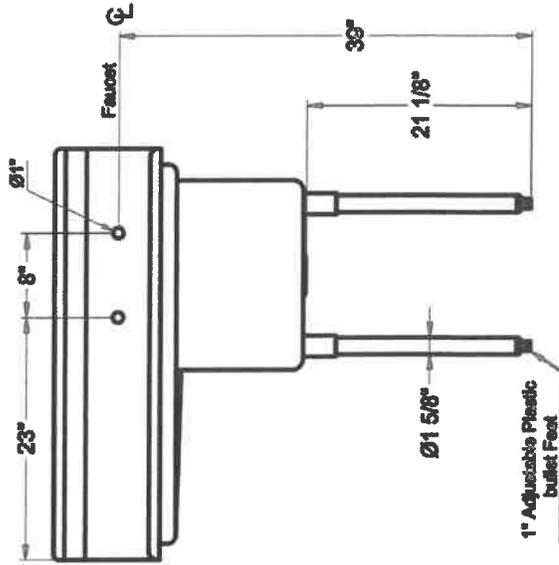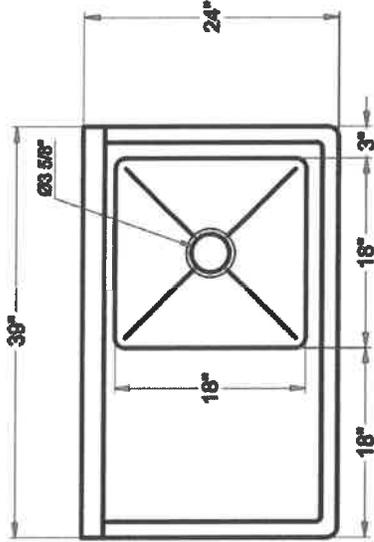

Visit our website at

www.GSW-USA.com

4177 Rowland Ave., #B, El Monte, CA 91731
Tel.: (800) 897-5999, (626) 291-5589
Fax: (626) 286-0133
E-mail: sales@gsw-usa.com






GSW[®]
www.GSW-USA.com


Item No.: _____
Order No.: _____
QTY: _____ Date: _____

WALL MOUNT HAND SINK

Top

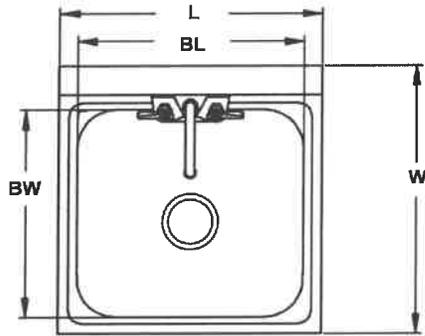

Front

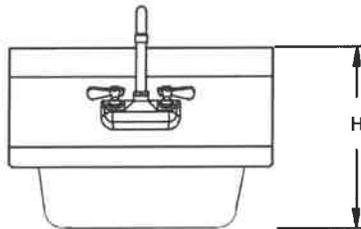

HS-xxxxW



HS-xxxxS



Description:

- HS-xxxxS series welded with splash guard (7-3/4" H)
- Faucet & strainer included

Order No.	W x L x H (in)	BW	BL	BD	G. W. (lbs)	Qty.
HS-0810W	12-1/4 x 12 x 12-3/4	8	10	5	8	1
HS-0810S	12-1/4 x 12 x 12-3/4	8	10	5	11	1
HS-1217W	17-7/8 x 12-1/2 x 13-3/8	12-1/2	9-3/4	7-3/4	10	1
HS-1217S	17-7/8 x 12-1/2 x 13-3/8	12-1/2	9-3/4	7-3/4	14	1
HS-1615W	15-1/4 x 15-3/4 x 14-3/8	9-3/4	12-1/2	6-5/8	12	1
HS-1615S	15-1/4 x 15-3/4 x 14-3/8	9-3/4	12-1/2	6-5/8	15	1
HS-2017W	17-1/2 x 20-1/2 x 14-3/4	12-3/4	17-3/4	7	13	1
HS-2017S	17-1/2 x 20-1/2 x 14-3/4	12-3/4	17-3/4	7	17	1

GSW®






SANITATION LISTED
3176427
Conforms to **NSF**
STD 2 & STD 4

Intertek

SEE18183D

Economy Three Tub Sink w/ 2 Drain Boards

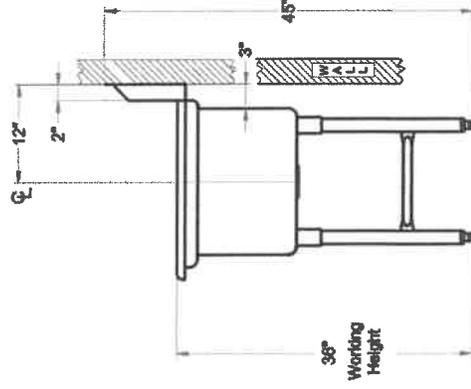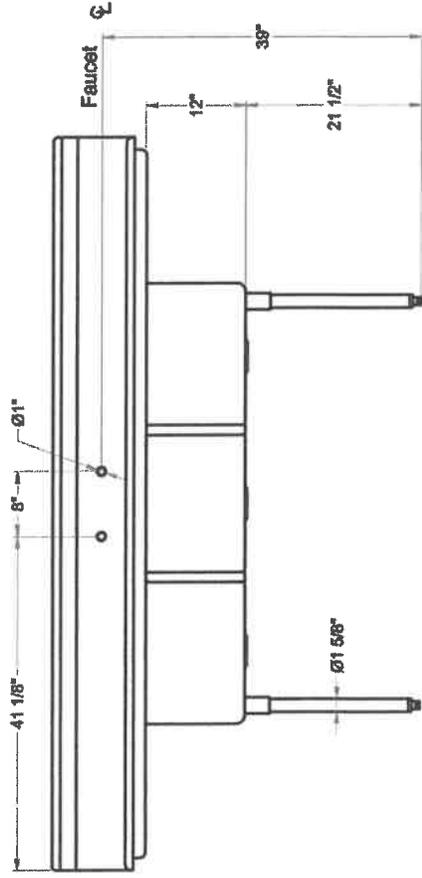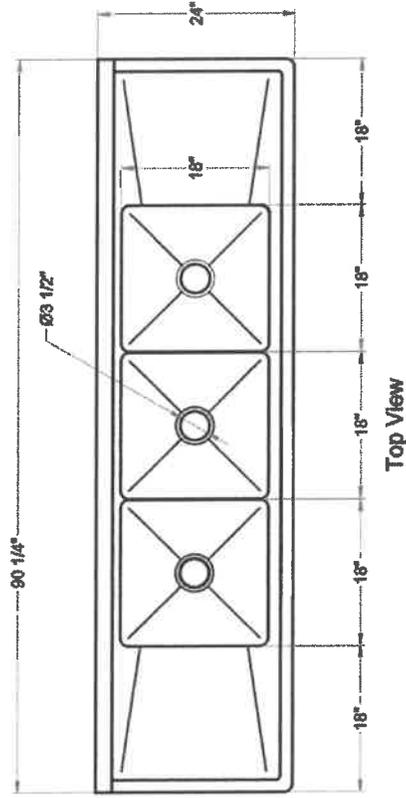

Visit our website at

www.GSW-USA.com

4177 Rowland Ave., #B, El Monte, CA 91731
Tel: (800) 897-5999, (626) 291-5599 Fax: (626)286-0133
E-mail: sales@gsw-usa.com



Item# _____
 Project: _____
 Qty: _____

Gas Fryers

SGF-40L / SGF-40N



SGF-50L / SGF-50N



SGF-70L / SGF-70N



Features

- 35-40 lb. oil capacity (SGF-40N / SGF-40L)
- 45-50 lb. oil capacity (SGF-50N / SGF-50L)
- 65-70 lb. oil capacity (SGF-70N / SGF-70L)
- Tube design with baffles inside for better heat transfer
- Stainless steel vat with peened finish
- Stainless steel door, front, top and header
- Continuous pilot / easy start main flame
- Double rod stainless steel basket hanger
- Chromed basket with plastic coated handle
- Large cold zone to prevent scorching at the bottom
- Robert Shaw control system
- Prompt temperature recovery
- 1 1/4" Full-port drain for easy cleaning
- Thermostat adjusts from 200° to 400° F
- 450° Hi-limiter for safety
- 6" Stainless steel, heavy duty, adjustable legs

One Year - Parts & Labor on entire unit. Valid in United States

SERV-WARE

Serv-Ware
www.servware.com

Phone:(800).768.5953

Revised 10/18

Fax:(800).976.1299



Intertek



Intertek

Item# _____
 Project: _____
 Qty: _____




Gas Fryers

SGF-40L / SGF-40N


* Shown Below

SGF-50L / SGF-50N

SGF-70L / SGF-70N

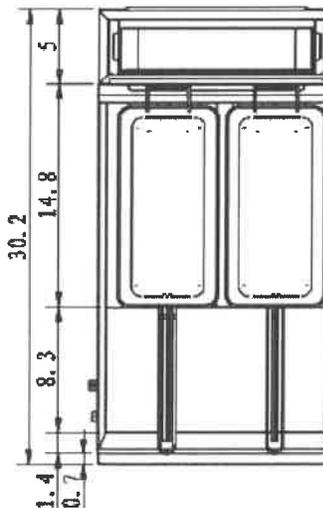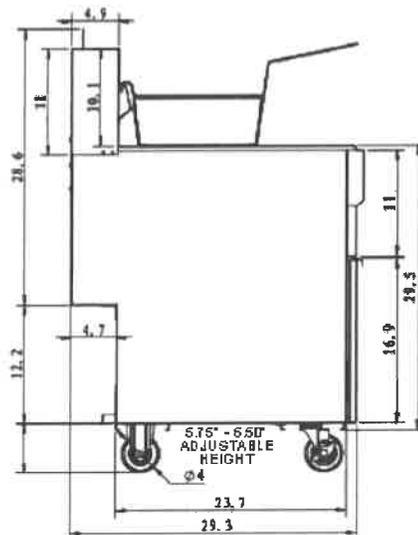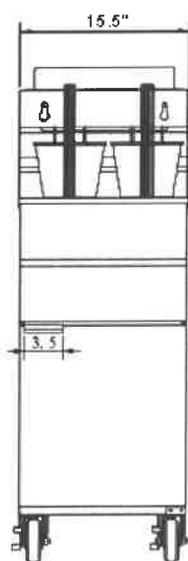

Model	Description	Dimensions (W x D x H)	Weight/lbs (Shipping)
SGF-40N	3 Tube Natural	15.5" x 30.2" x 46.5"	161 lbs.
SGF-40L	3 Tube LP		
SGF-50N	4 Tube Natural	15.5" x 30.2" x 46.5"	172 lbs.
SGF-50L	4 Tube LP		
SGF-70N	5 Tube Natural	21" x 30.2" x 46.5"	187 lbs.
SGF-70L	5 Tube LP		



Serv-Ware
www.servware.com
 Phone:(800).768.5953

Revised 10/18
 Fax:(800).976.1299



Intertek

Intertek



4184 E. Conant st., Long Beach, CA 90808
 Tel. 800-500-3519 Fax. 310-900-1066
 www.turboairinc.com

Project :	
Model # :	
Item # :	Qty :
Available W/H :	
Approval :	

36" Wide Heavy Duty Restaurant Ranges

**Model : TAR-6
 TAR-6-LP**



≡ FEATURES & BENEFITS ≡

- Heavy gauge welded frame construction
- Fully adjustable oven thermostat providing temperatures from 250-550°F degrees
- Stainless steel front, sides, back riser lift-off high shelf
- Pull out stainless steel door for easy cleaning
- Individual pilot for each lift off top open burner at 32,000 btu/hr
- Thermostat controlled griddle
- 6" stainless steel adjustable legs (casters available as an option)
- 1 stainless steel oven rack standard (additional racks optional)
- 12" x 12" sectioned heavy duty cast iron grates
- CSA certified for safety / sanitation for USA and Canada
- Full size pull out crumb tray
- Wrap around full stainless steel oven interior / 26.3" depth standard



Model	Oven	Weight (lbs.)	Width (inches)	Total BTUs	Configuration
TAR-6	1	527	36	227K	6 open burners (NAT)
TAR-6-LP	1	527	36	224K	6 open burners (LPG)

Ver.201601

36" Wide Heavy Duty Restaurant Ranges

Model : TAR-6

DATA	TAR-6
Gas Type	NAT
Gas Connection	3/4"
Regulator	3/4"
Gas Pressure	5 W.C"
BTU	227,000

DIMENSIONAL DATA	
Ext. Length Overall (inch)	36 (914mm)
Ext. Depth Overall (inch)	31 7/8 (810mm) + manifold
Ext. Height Overall (inch)	56 1/2 (1436mm)

OVEN DIMENSION (Interior)	
Number of Oven	1
Length (inch)	26 3/8 (670mm)
Depth (inch)	26 1/4 (669mm)
Height (inch)	13 5/8 (345mm)
Weight (lbs.)	527

DATA	TAR-6-LP
Gas Type	LPG
Gas Connection	3/4"
Regulator	3/4"
Gas Pressure	10 W.C"
BTU	224,000

DIMENSIONAL DATA	
Ext. Length Overall (inch)	36 (914mm)
Ext. Depth Overall (inch)	31 7/8 (810mm) + manifold
Ext. Height Overall (inch)	56 1/2 (1436mm)

OVEN DIMENSION (Interior)	
Number of Oven	1
Length (inch)	26 3/8 (670mm)
Depth (inch)	26 1/4 (669mm)
Height (inch)	13 5/8 (345mm)
Weight (lbs.)	527

Design and specifications subject to change without notice.
Actual shipping weight may differ due to extra packing materials for product protection.


■ **WARRANTY : 1 Year Labor and Parts Warranty**

■ **OPTIONAL ACCESSORIES :**


- Casters (Set of 4)
- Stainless steel oven racks

PLAN VIEW

(unit : inch)

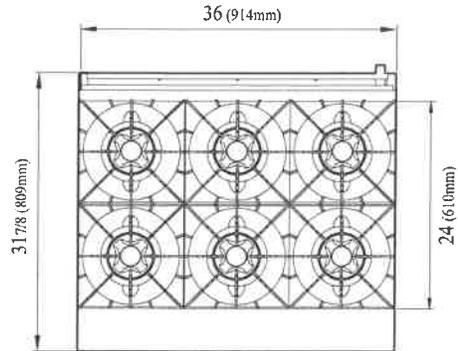

TOP VIEW

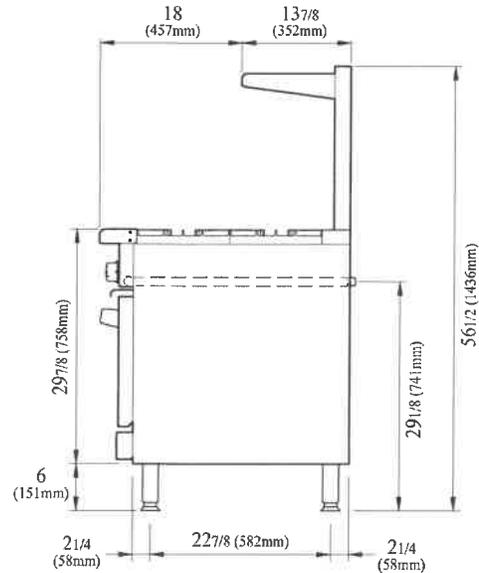

SIDE VIEW

Ver.201601



- Turbo Air : 800-627-0032
- GK : 800-500-3519
- Warranty : 800-381-7770
- AC : 888-900-1002





Atlanta Culinary Equipment Inc.

Quality Stainless Steel Fabrication

2063 Mountain Industrial Blvd, Tucker, GA 30084

Tel: 770-908-3838

Fax: 770-938-3878



www.atlequipment.com



SANITATION LISTED
CONFORMS TO NSF STD.4
COMMERCIAL COOKING
AND HOT FOOD
STORAGE EQUIPMENT

3176427


Chinese Wok Range Info Sheet

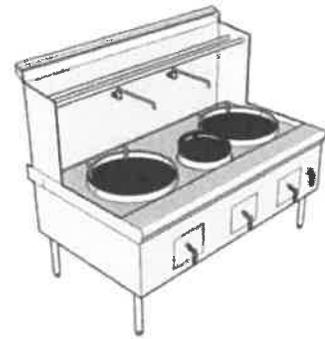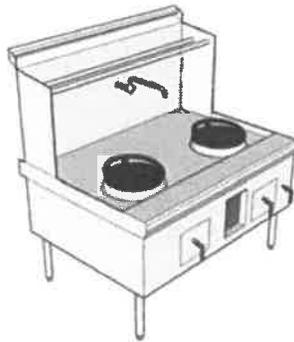

Standard Features:

- * Available openings: 13", 16", 18", 20", 22", 24"
- * Stainless steel top, back, sides and front panels.
- * Choice of burners.
- * Front drainage trough with waterfall backsplash cooling.
- * One manually operated swing faucet for every two wells.
- * Two stainless steel rear top rails.
- * Separate galvanized drip pan under each burner for grease and debris collection.
- * One stainless steel waste basket.
- ** 3/4" gas inlet for single well.
- ** 1-1/4" gas inlet for two to four wells.
- ** 1-1/2" gas inlet for five wells and up.
- *** 1/2" water inlet.

Choice Of Burners:

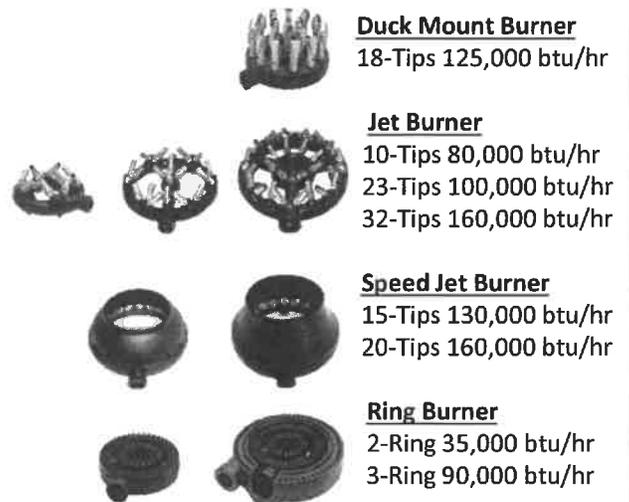

Optional Accessories

- * Stainless steel drip pan.
- * Space between wells over 10"
- * Back drainage.
- * Additional side splash
- * Automatic swing faucet
- * Opening for oil pan.
- * AGA safety valve



Automatic Swing Faucet
(Option)



Manual Swing Faucet
(Standard)




Safety Valve
(Option)



Side
Splash
(Option)

Opening
For Oil Pan
(Option)

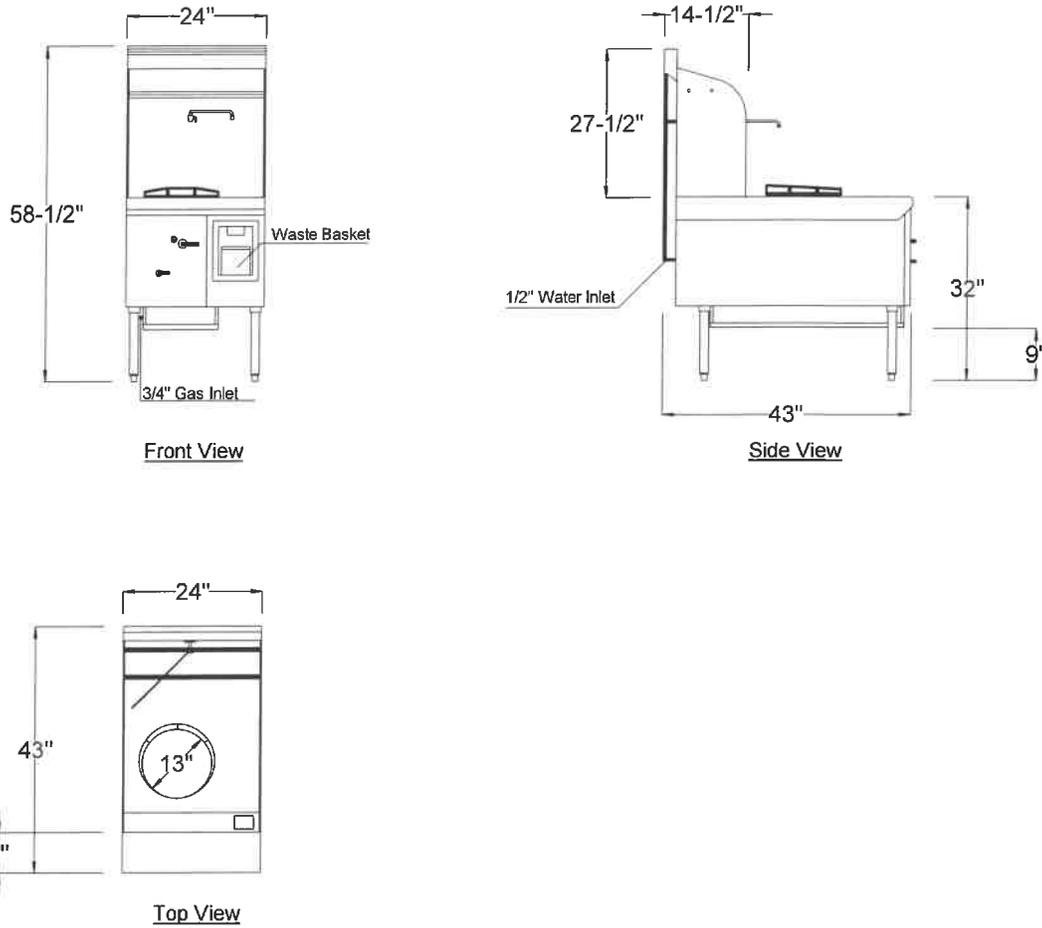

SPECIFICATION:

- 13" Diameter - 15 Tips 9" Dia. Speed Jet Burner - 130,000 Btu/Hr (WR-JBC9) - Nat/Gas
- Manual Wok Range Swing Faucet, 1/2" NPT Male Inlet (AA-513G)
- Front Drainage Tunnel
- Water Fall Back Splash

Manufacturer:	Model:	Overall Dimension:	Description:
Atlanta Culinary Equipment Inc 2063 Mountain Industrial Blvd Tucker, GA 30084 Tel: 770-908-3838 Fax: 770-938-3878	Pinnacle Equipment Supplies Corp. 6437-C General Green Way Alexandria, VA 22312 Tel: 703-750-2268 / 750-2260 Fax: 703-750-9773 / 750-2215 Email: info@pinnaclesupplies.us	CWR-1-13	24"L x 43"W x 58-1/2"H One Chamber Gas Wok Range Nat/Gas (ETL)

GAS & ELECTRIC PRODUCTS

COUNTERTOP FOOD WARMER



SEJ80000 SEJ80000C
NSF **ETL**
Voltage: 110V, 60Hz
Max: 175°F
Wattage: 1200W

- Heavy duty stainless steel body.
- Thermostatically controlled heating element for longer life.
- Water resistant on/off switch cover.
- Standard 20" x 12" inside well opening accepts most popular steamer pans.
- Includes: 59" power cord & 3-prong grounded plug.



SEJ81000C
ETL **ETL**
Intertek **Intertek**
Voltage: 120V
Max: 194°F
Wattage: 1200W

ITEM	DESCRIPTION	U/M	WEIGHT GROSS lbs	INNER PACK	MASTER PACK	CU.FT.
SEJ80000	3.5 qt Well Capacity, Mirror Finish - Made in Taiwan	EACH	24.25	1	1	2.96
SEJ80000C	3.5 qt Well Capacity - Brushed S/S Finish	EACH	18.00	1	1	2.49
SEJ81000C	3.5 qt Well Capacity - Brushed S/S Finish with Heat Vent	EACH	18.00	1	1	2.49



RINNAI GAS COOKER

Prepare rice in this appliance without worries of over cooking. Makes 100 bowls of rice in just 22 minutes (270 servings at 3 oz each). LP or Natural Gas with piezo pilot ignition. Reduces hazards with Flame Failure Safety Device. Design and safety rated. Made in Japan.



Gas Input Rating: 35,000 BTU/h (Natural Gas), 34,000 BTU/h (Propane Gas)
 Gas Connection: 1/2" NPT Female
 Safety Device: Flame Failure Safety Device



Rinnai
 RER55ASL, RER55ASN

ITEM	DESCRIPTION	U/M	WEIGHT GROSS lbs	INNER PACK	MASTER PACK	CU.FT.
RER55ASL	55 cups Propane	EACH	45.00	1	1	5.36
RER55ASN	55 cups Natural Gas	EACH	45.00	1	1	5.36

50 CUP GAS COOKERS (MADE IN TAIWAN)

Great for serving restaurant meals. Makes 50 cups or 270 servings at 3 oz each. Cooking capacity ranges from 30 cups (60 bowls) to 50 cups (100 bowls).

Input Rating: 35,000 BTU/h
 Gas Connection: 1/2" NPT Female
 Reduces hazards with Flame Failure Safety Device



GSRC005L, GSRC005N
 No NSF and No Warranty

ITEM	DESCRIPTION	U/M	WEIGHT GROSS lbs	INNER PACK	MASTER PACK	CU.FT.
GSRC005L	50 cups, Propane	EACH	43.56	1	1	3.80
GSRC005N	50 cups, Natural Gas	EACH	43.56	1	1	3.80

ELECTRIC RICE COOKER & WARMER

Makes 30 cups of hassle-free rice. Cooks and keeps warm automatically. Inner pot is available with a non-stick finish. Voltage: 110V-120V. AC 60Hz. Wattage: 1780W.



SEJ50000, SEJ50000T
 Voltage: 110V-120V AC / 60Hz
 Wattage: 1780W

ITEM	DESCRIPTION	U/M	WEIGHT GROSS lbs	INNER PACK	MASTER PACK	CU.FT.
SEJ50000	30 cups	EACH	20.00	1	1	2.06
SEJ50000T	30 cups Nonstick	EACH	20.00	1	1	2.06

PARTS

SEJB001	Inner Pot for SEJ50000	EACH				
SEJB001T	Inner Pot for SEJ50000T	EACH				
SEJB002	Lid	EACH				



Mop Sink

Stainless Steel Service Sinks



Use your smart phone to scan the above QR code to visit our website:
www.bk-resources.com



Features:

- Skirted on 3 Sides
- Floor Mounted
- Drain Included
- 1 Year Warranty



Material:

- T-304 18 ga. Stainless Steel

Options:

- Optional Kit, Including: BK-SFH-48 Service Hose, BKSF-WB1 Service Faucet & BK-UTH-5 Tool Holder
- Service Faucet Hose
- Service Faucet

Part Number	Bowl Dim. (l x w x d)	Overall Dim. (l x w x d)	Sink Depth
BKMS-1620-6	20" x 16" x 6"	24 1/2" x 19 3/8" x 11"	6"
BKMS-1620-12	20" x 16" x 12"	24 1/2" x 19 3/8" x 17"	12"
BKMS-2424-12	24" x 24" x 12"	27 1/2" x 28 5/8" x 17"	12"

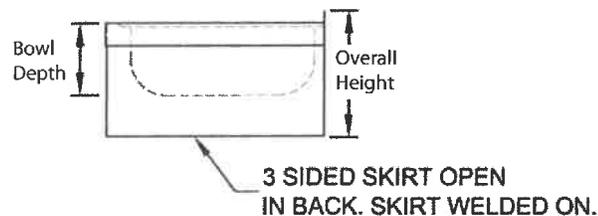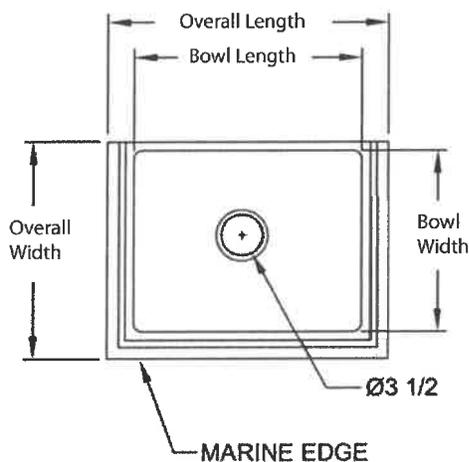

PRODUCT DATA SHEET

BK RESOURCES





UNDER COUNTER REFRIGERATOR

Los Angeles Office 2460 Peck Road, City of Industry, CA 90601 (562) 568-4060 www.dukersusa.com
 New Jersey Office 4475 S Clinton Ave South Plainfield, NJ 07080 (215) 808-8239 info@dukerusa.com

MODEL: DUC48R

Features and Benefits

- * Higher Resistance to Dust , high quality condenser
- * R290 Natural Refrigerant, promotes faster cool down and efficient energy consumption
- * 3-year parts and labor, 5-year compressor warranty
- * Stainless steel inside and outside, sealed interior floors and rounder cabinet corners for easy cleaning
- * Self-closing doors with stay open feature.
- * Adjustable, heavy duty shelves



Technical Specifications

Voltage/Frequency	115V 60Hz
Refrigerant	R290
Type of Defrost	Automatic
Exterior Finish	Stainless steel
Interior Finish	Stainless steel
Net Weight	211lbs
Total Capacity	12.21 cu ft
Total Current	2.4A
Climatic Category	4/5
Nema Config.	5-15P



MODEL NO	TEMPERATURE RANGE (°F)	EXTERNAL DIMENSION WXDHX(INCHES)	PACKING CARTON WXDHX(INCHES)	DOOR	40GP CONTAINER CERTIFICATION
----------	------------------------	----------------------------------	------------------------------	------	------------------------------

DUC48R	33°- 41° F	48½" X 31½" X 35¾"	49¾" X 33¾" X 39¾"	2	46
--------	------------	--------------------	--------------------	---	----

UNDER COUNTER REFRIGERATOR

MODEL: DUC48R

Model:	DUC48R
Rated Voltage:	115V AC
Rated Frequency:	60Hz
Total Input Power:	280W
Total Current:	2.4A
Total Capacity:	12.21 cu ft
Refrigerant:	R290/3.17oz
Climatic Category:	4/5
Protection Type	I
Design pressure	High Side :300PSIG Low Side:150PSIG
Insulation Blowing Gas	C-pentane
Net Weight:	211 lbs
NEMA Cofig.	5-15P

STANDARD FEATURES

BACK MOUNT COMPRESSOR

The back mount compressor structure is placed in the coolest possible area, provides quick and easy service

HIGH QUALITY STEEL

Interior and exterior high quality steel minimizes dents, scratches and rust

HIGH DENSITY POLYURETHANE INSULATION CFC

free and high density cell foam is Eco-friendly and more energy efficient

STURDY, CLEAN STAINLESS SHELVEING

High quality coated stainless shelves may prevent peel and rust.

SELF-CLOSING DOOR SYSTEM

Door Automatically close at 60°

REFRIGERATORS HOLDS 33 °F - 41 °F


FOR BEST IN REFRIGERATORS




NEMA 5-15P
115/60/1

PLAN VIEW

FRONT VIEW

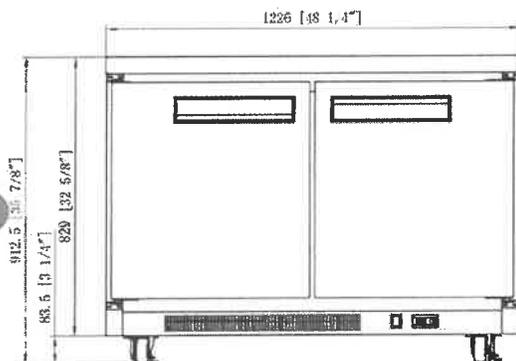

SIDE VIEW

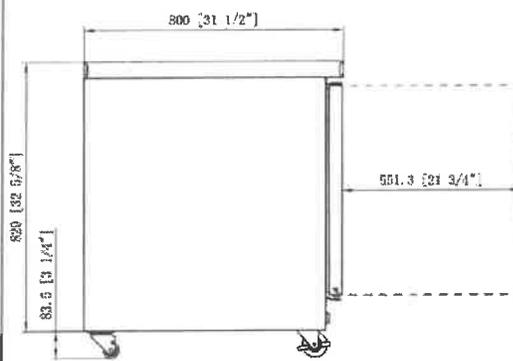

New Jersey Office
4475 S. Clinton Ave,
South Plainfield, NJ 07080
(215) 808-8239
Info@dukersusa.com

Los Angeles Office
2460 Peck Road,
City of Industry, CA 90601
(562) 568-4060
Info@dukersusa.com



UNDER COUNTER REFRIGERATOR

Los Angeles Office 2460 Peck Road, City of Industry, CA 90601 (562) 568-4060 www.dukersusa.com
 New Jersey Office 4475 S Clinton Ave South Plainfield, NJ 07080 (215) 808-8239 Info@dukerusa.com

MODEL: DUC60F

Features and Benefits

- * Higher Resistance to Dust , high quality condenser
- * R290 Natural Refrigerant, promotes faster cool down and efficient energy consumption
- * 3-year parts and labor, 5-year compressor warranty
- * Stainless steel inside and outside, sealed interior floors and rounder cabinet corners for easy cleaning
- * Self-closing doors with stay open feature.
- * Adjustable, heavy duty shelves



Technical Specifications

Voltage/Frequency	115V 60Hz
Refrigerant	R290
Type of Defrost	Automatic
Exterior Finish	Stainless steel
Interior Finish	Stainless steel
Net Weight	231lbs
Total Capacity	15.53 cu ft
Total Current	8.0A
Climatic Category	4/5
Nema Config.	5-15P



MODEL NO	TEMPERATURE RANGE (°F)	EXTERNAL DIMENSION WXDHX(INCHES)	PACKING CARTON WXDHX(INCHES)	DOOR	40GP CONTAINER CERTIFICATION
DUC60F Hinata Japanese Restaurant	0 °F - 8 °F	60" W X 31½" X 35½"	61½" X 33½" X 39½" Pinnacle Equipment Supplies Corp.	2	44 Page: 33

UNDER COUNTER REFRIGERATOR

MODEL: DUC60F

Model:	DUC60F
Rated Voltage:	115V AC
Rated Frequency:	60Hz
Total Input Power:	950W
Total Current:	8.0A
Total Capacity:	15.53 cu ft
Refrigerant:	R290/4.76oz
Climatic Category:	4/5
Protection Type	I
Design pressure	High Side :300PSIG Low Side:150PSIG
Insulation Blowing Gas	C-pentane
Net Weight:	231 lbs
NEMA Cofig.	5-15P

STANDARD FEATURES

BACK MOUNT COMPRESSOR

The back mount compressor structure is placed in the coolest possible area, provides quick and easy service

HIGH QUALITY STEEL

Interior and exterior high quality steel minimizes dents, scratches and rust

HIGH DENSITY POLYURETHANE INSULATION CFC

free and high density cell foam is Eco-friendly and more energy efficient

STURDY, CLEAN STAINLESS SHELVEING

High quality coated stainless shelves may prevent peel and rust.

SELF-CLOSING DOOR SYSTEM

Door Automatically close at 60°


FREEZER HOLDS 0 °F - 8 °F FOR BEST IN FREEZER




NEMA 5-15P
115/60/1

PLAN VIEW

FRONT VIEW

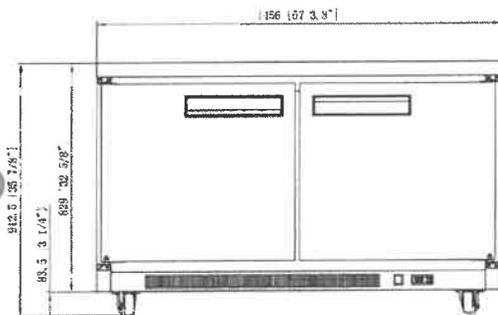

SIDE VIEW

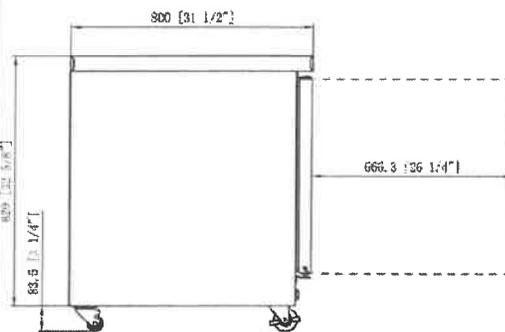

AQ AutoQuotes




New Jersey Office
4475 S. Clifton Ave,
South Plainfield, NJ 07080
(215) 808-8239
Info@dukersusa.com

Los Angeles Office
2460 Peck Road,
City of Industry, CA 90601
(562) 568-4060
Info@dukersusa.com


Premium Steel Lockers Series

Ideal for restaurant, school, industry, office and recreational facilities!

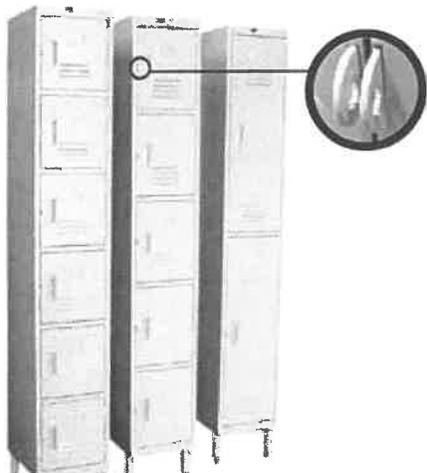

- Constructed of strong steel in gray powder coated finish
- leg space for easy cleaning
- Louvered door with flush pull or handle and will accept padlock
- Name plate or tag holder included
- Shipped assemble or unassembled

Item No.	Doors Opening (in)	Dimension (in)	Doors	G. W. (lb)
EL-2DR	10-3/16 x 33-9/16	12 x 20 x 77	2	60
EL-5DR	10-3/16 x 13	12 x 20 x 77	5	65
EL-6DR	10-3/16 x 10-9/16	12 x 20 x 77	6	70
ELS-5DR	10-3/16 x 13	12 x 16 x 77	5	60
ELS-6DR	10-3/16 x 10-9/16	12 x 16 x 77	6	65

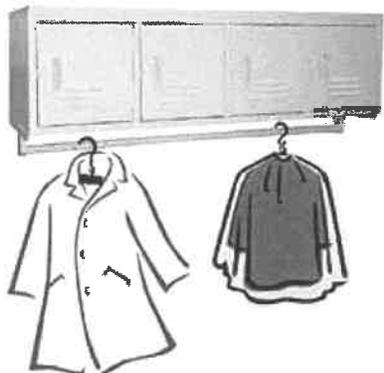

- Comes with hanging coat tube

Item No.	Doors Opening (in)	Dimension (in)	Doors	G. W. (lb)
ELS-4DR	10-3/16 x 10-9/16	45 x 16 x 13	4	42

**ELS-16DR is combination of 1 ELS-4DR with 2 ELS-6DR
ELS-6DR can be replaced with any locker for different combination.**



- ELS-4DR comes with hanging coat tube

Item No.	Doors Opening (in)	Dimension (in)	Doors	G. W. (lb)
ELS-16DR	10-3/16 x 10-9/16	68 x 16 x 77	6	175



COMMERCIAL REFRIGERATION

www.blueairinc.com | info@blueairinc.com

Toll Free 1.866.677.8500

PROJECT :

MODEL # :

ITEM # :

QTY :

AVAILABLE W/H :

APPROVAL :

Bottom Mount Reach-In Refrigerator / Freezer

D-SERIES



BSR23 / BSF23

BSR49 / BSF49

BSR72 / BSF72

STANDARD FEATURES

BOTTOM MOUNT COMPRESSOR
THE BOTTOM MOUNT COMPRESSOR PROVIDES QUICK AND EASY MAINTENANCE

STAINLESS STEEL INTERIOR AND EXTERIOR
QUALITY STAINLESS STEEL HELPS MINIMIZE DENTS, SCRATCHES AND RUST

STANDARD REAR WALL AIR GUARD ENSURES PROPER AIR FLOW AND COOLING

EVAPORATOR FAN STOPS AUTOMATICALLY WHEN DOOR IS OPENED

RECESSED DOOR HANDLES
RECESSED DOOR HANDLES HELP PREVENT SHIPPING DAMAGE AND HANDLE BREAKAGE

STANDARD DOOR LOCKS

CFC FREE HIGH DENSITY CELL POLYURETHANE INSULATION

INTERIOR LED LIGHT

DIGITAL TOTAL MONITORING SYSTEM
OFFERS AN AUTOMATIC DOOR ALARM SYSTEM, EASY TEMPERATURE ADJUSTMENT AND A SIMPLE TO CONTROL DEFROST CYCLE

4" DIAMETER SWIVEL CASTERS WITH FRONT BRAKES

ALL MODELS ACCOMMODATE FULL SIZE BUN SHEET PANS

4 SHELVES PER EACH DOOR SECTION WITH 1" ADJUSTABLE SHELVING HEIGHT

SELF-CLOSING AND STAY OPEN DOOR
DOORS REMAIN OPEN AT 120° AND AUTOMATICALLY CLOSE AT 96°

DOOR OPEN WARNING ALARM

FIELD REVERSIBLE DOOR (ADDITIONAL KIT REQUIRED)
BSF23 AND BSR23 MODELS ONLY

ALL MODELS ARE ENERGY STAR RATED



WARRANTY
 3 Years Parts and Labor
 5 Years on Compressor in USA

APPROVALS:

AVAILABLE AT:


VER040117

Bottom Mount Reach-In Refrigerator / Freezer


D-SERIES

Product plan View

-Top view-

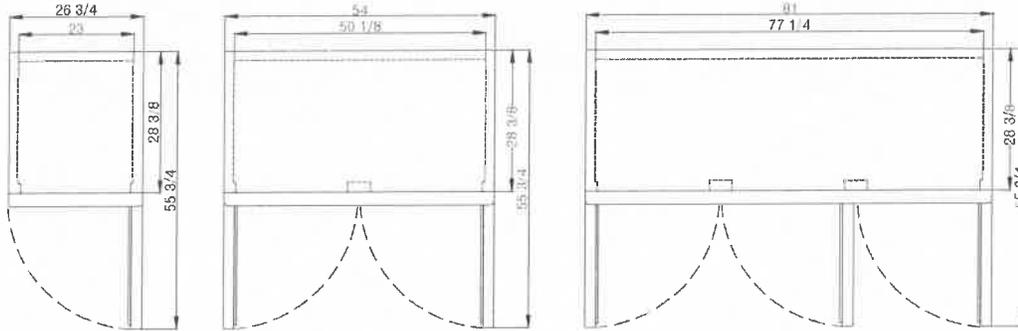

-Front view-

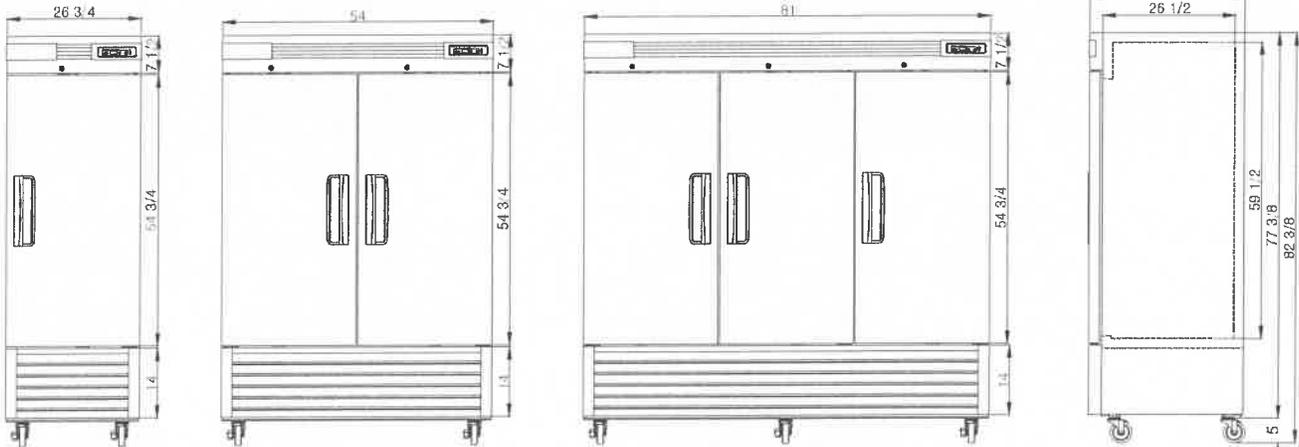

[BSF23/ BSR23]

[BSF49/ BSR49]

[BSF72/ BSR72]

Product Specification

Bottom Mount Reach-In Freezer / D-Series

Model	Product Description			Refrigerant	Temperature Range			Easy Maintenance			Cord Length (ft/m)	
	Bottom Mount Freezer			R-404a	-10 ~ 0 °F			Sliding Condensing Unit			9.8ft (3m)	
	Doors	Capacity (Cu. Ft.)	Shelves	Cabinet Dimensions (inches / mm)			HP	Voltage	Amps	NEMA Config.	Net Weight (lbs/kg)	Ship Weight (lbs/kg)
			L	D	H							
BSF23	1	23	4	26 3/4" (681mm)	31" (787mm)	82 3/8" (2100mm)	1/3	115V/60Hz	7	NEMA 5-15	284 (129)	350 (159)
BSF49	2	49	8	54" (1370mm)	31" (787mm)	82 3/8" (2100mm)	3/4	115V/60Hz	11.8	NEMA 5-15	403 (183)	480 (218)
BSF72	3	72	12	81" (2060mm)	31" (787mm)	82 3/8" (2100mm)	1	AC 115V / 208~230V/60Hz	9.2 / 4.7	NEMA 14-20	624 (283)	639 (290)

Bottom Mount Reach-In Refrigerator / D-Series

Model	Product Description			Refrigerant	Temperature Range			Easy Maintenance			Cord Length (ft/m)	
	Bottom Mount Refrigerator			R-134a	33 ~ 38 °F			Sliding Condensing Unit			9.8ft (3m)	
	Doors	Capacity (Cu. Ft.)	Shelves	Cabinet Dimensions (inches / mm)			HP	Voltage	Amps	NEMA Config.	Net Weight (lbs/kg)	Ship Weight (lbs/kg)
			L	D	H							
BSR23	1	23	4	26 3/4" (681mm)	31" (787mm)	82 3/8" (2100mm)	1/3	115V/60Hz	6	NEMA 5-15	271 (123)	300 (136)
BSR49	2	49	8	54" (1370mm)	31" (787mm)	82 3/8" (2100mm)	1/3	115V/60Hz	7	NEMA 5-15	370 (168)	450 (204)
BSR72	3	72	12	81" (2060mm)	31" (787mm)	82 3/8" (2100mm)	3/4	115V/60Hz	10.3	NEMA 5-15	595 (270)	637 (289)

* BLUE AIR has the right to change specifications without further notice.



<http://www.blueairinc.com>
info@blueairinc.com
 Toll Free. 1.866.677.8500

223 W. Rosecrans Ave., Gardena, CA., 90248
 T.310.808.0102, F.310.808.0242

9 W. Shelton Terrace #A, Hillside, NJ., 07205
 T.908.688.0970, F.908.688.8143



4184 E. Conant st., Long Beach, CA 90808
Tel. 800-500-3519 Fax. 310-900-1066
www.turboairinc.com

Project :

Model # :

Item # :

Qty :

Available W/H :

Approval :

Microwave Oven - Medium Duty

Model : TMW-1100NM



≡ FEATURES & BENEFITS ≡

- Commercial durability (1000W) & Euro styling
- Easy grip and commercial door handle
- Safety interlock system
- Tempered glass door with interior light allows monitoring the food inside
- Easy-to-clean interior
- 5 power setting for a designed power level
- Multi power setting for cooking versatility
- Time defrost
- Stainless steel exterior for easy cleaning & durability
- Continuous start button



Model	Exterior Dimension L x D x H (inches)	Interior Dimension L x D x H (inches)	Net Weight (lbs.)
TMW-1100NM	21 ³ / ₈ x 18 ¹ / ₈ x 13	13 ³ / ₄ x 14 x 9	40

Ver.20180814

Microwave Oven - Medium Duty

Model : TMW-1100NM


Power Output	1000W	
Power Source	120V, 60Hz	
Power Input	1500W, 14A	
Controller Type	Manual	
Controller Location	Right	
Cavity	29L (1.0cu.ft)	
Number of programs	No	
Number of programmable stages	No	
Exterior Construction	Stainless Steel	
Interior Base	Static borosilicate glass	
Removable Ceiling Cover	No	
Air Filter	No	
Gastronorm Compatible	2/3GN	
Internal lamp	Yes	
Lamp Replaceable by Customer	No	
Weight(Net/Gross)	40Lbs/44Lbs	
External Dimensions (inch)		
Width	21 ³ / ₈	
Depth	18 ¹ / ₈	
Height	13	
Internal/Cavity Dimensions (inch)		
Width	13 ³ / ₄	
Depth	14	
Height	9	
Power Levels	Output	%
Level 5	1000	100%
Level 4	700	70%
Level 3	500	50%
Level 2	300	30%
Level 1	0	0%
Number of Magnetrons	1	

Design and specifications subject to change without notice.


Actual shipping weight may differ due to extra packing materials for product protection.

■ WARRANTY : 1 Year Parts and Labor Warranty

PLAN VIEW

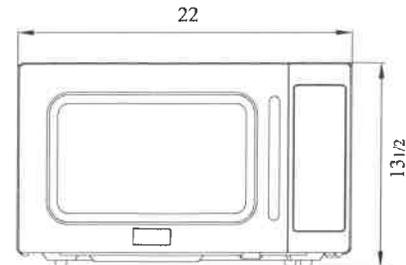

FRONT VIEW

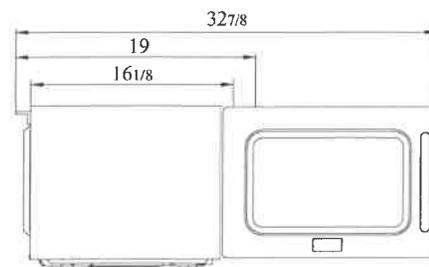

SIDE VIEW

Ver.20180814



- Turbo Air : 800-627-0032
- GK : 800-500-3519
- Warranty : 800-381-7770
- AC : 888-900-1002

Turbo air

GERMAN KNIFE

RADIANCE

Turbo air

TEXAKING

GAS & ELECTRIC PRODUCTS

STAINLESS STEEL SOUP WARMER

Keep soup at the proper temperature ready to serve. Epoxy coated aluminum body made to match any kitchen decor. Lid attached with hinges for quick serving. Adjustable temperature control. Stainless collar. Available in black, silver or brown.

SEJ30000C

SEJ31000C

SEJ32000C



Voltage: 110V-120V
Max: 175°F
Wattage: 475W



Gift boxed



SEJ30000TW
SEJ31000TW
SEJ32000TW



Voltage: 110V-120V
Max: 175°F
Wattage: 600W
Made in Taiwan



SEJ35000C



Voltage: 110V-120V
Max: 185°F
Wattage: 400W



Gift boxed

ITEM	DESCRIPTION	U/M	WEIGHT GROSS lbs	INNER PACK	MASTER PACK	CU.FT.
SEJ30000C	10.5 qt - Black	EACH	12.39	1	1	1.60
SEJ31000C	10.5 qt - Silver	EACH	12.39	1	1	1.60
SEJ32000C	10.5 qt - Brown	EACH	12.39	1	1	1.60
SEJ12007-1	Inner Pot for SEJ30000C, SEJ31000C, SEJ32000C	EACH				
SEJ30000TW	10 qt - Black	EACH	15.00	1	1	1.78
SEJ31000TW	10 qt - Silver	EACH	15.00	1	1	1.78
SEJ32000TW	10 qt - Brown	EACH	15.00	1	1	1.78
SEJ12007	Inner Pot for SEJ30000TW, SEJ31000TW, SEJ32000TW	EACH				
SEJ35000C	10 qt - Black	EACH	12.39	1	1	1.60

STAINLESS STEEL SOUP/ FOOD WARMER



Voltage: 120V
Max: 185°F
Wattage: 800W



SEJ38000C

Gift boxed



- Stainless steel case and interior lining
- Thermostatic heat control with 6 settings
- Dishwasher safe
- Inset and hinged cover included

ITEM	DESCRIPTION	U/M	WEIGHT GROSS lbs	INNER PACK	MASTER PACK	CU.FT.
SEJ38000C	10.5 Qt Stainless Steel Soup/Food Warmer	EACH	14.26	1	1	1.60

SEALING MACHINES



Seals bags of candy, peanuts...etc. with a secure tight seal. Cast iron body. Electrical appliance with adjustable temperature dial for different bag materials and thickness. Available in 4", 8", 11" and 15 3/4" lengths.



IRTISH100

ITEM	DESCRIPTION	U/M	WEIGHT GROSS lbs	INNER PACK	MASTER PACK	CU.FT.
IRTISH100	4", 100 mm	EACH	48.50	1	12	2.30
IRTISH200	8", 200 mm	EACH	59.52	1	10	2.50
IRTISH300	11", 300 mm	EACH	55.12	1	6	2.60
IRTISH400	15 3/4", 400 mm	EACH	46.30	1	4	2.20



FOOD PREP TABLE REFRIGERATOR - REGULAR

Los Angeles Office 2460 Peck Road, City of Industry, CA 90601 (562) 568-4060 www.dukersusa.com
 New Jersey Office 4475 S Clinton Ave South Plainfield, NJ 07080 (215) 808-8239 info@dukerusa.com

MODEL: DSP48-12-S2

Features and Benefits

- * Higher Resistance to Dust, high quality condenser
- * R290 Natural Refrigerant, promotes faster cool down and efficient energy consumption
- * 3-year parts and labor, 5-year compressor warranty
- * Stainless steel inside and outside, sealed interior floors and rounder cabinet corners for easy cleaning
- * Self-closing doors with stay open feature.
- * Adjustable, heavy duty shelves



Technical Specifications

Voltage/Frequency	115V 60Hz
Refrigerant	R290
Type of Defrost	Automatic
Exterior Finish	Stainless steel
Interior Finish	Stainless steel
Net Weight	231 bs
Total Capacity	11.47 cu ft
Total Current	2.4A
Climatic Category	4/5
Nema Config.	5-15P

1/6	1/6	1/6	1/6	1/6	1/6	1/6
1/6	1/6	1/6	1/6	1/6	1/6	1/6



MODEL NO	TEMPERATURE RANGE (°F)	EXTERNAL DIMENSION WXD X H (INCHES)	PACKING CARTON WXD X H (INCHES)	DOOR	40GP CONTAINER CERTIFICATION
DSP48-12-S2 Hinata Japanese Restaurant	33°- 41° F	48 1/8" X 31 1/2" X 45 5/8" "	49 5/8" X 33 1/2" X 50 3/4"	2	46 Page: 41

FOOD PREP TABLE REFRIGERATOR - REGULAR

MODEL: DSP48-12-S2

Model:	DSP48-12-S2
Rated Voltage:	115V AC
Rated Frequency:	60Hz
Total Input Power:	280W
Total Current:	2.4A
Total Capacity:	11.47 cu ft
Refrigerant:	R290/3.17 oz
Climatic Category:	4/5
Protection Type	I
Design pressure	High Side :300PSIG Low Side:150PSIG
Insulation Blowing Gas	C-pentane
Net Weight:	231 lbs
NEMA Cofig.	5-15P
1/6 Pan Count	14

STANDARD FEATURES

BACK MOUNT COMPRESSOR

The back mount compressor structure is placed in the coolest possible area, provides quick and easy service

HIGH QUALITY STEEL

Interior and exterior high quality steel minimizes dents, scratches and rust

HIGH DENSITY POLYURETHANE INSULATION CFC

free and high density cell foam is Eco-friendly and more energy efficient

STURDY, CLEAN STAINLESS SHELVEING

High quality coated stainless shelves may prevent peel and rust.

SELF-CLOSING DOOR SYSTEM

Door Automatically close at 60°


REFRIGERATORS HOLDS 33°- 41° F FOR BEST IN REFRIGERATORS




NEMA 5-15P
115/60/1

PLAN VIEW

FRONT VIEW

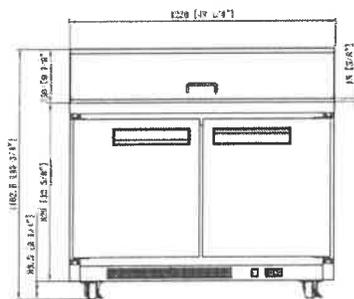

SIDE VIEW

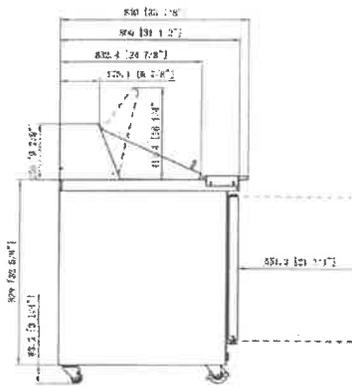

New Jersey Office
4475 S. Clinton Ave,
South Plainfield, NJ 07080
(215) 808-8239
Info@dukersusa.com

Los Angeles Office
2460 Peck Road,
City of Industry, CA 90601
(562) 568-4060
Info@dukersusa.com




4184 E. Conant st., Long Beach, CA 90808
 Tel. 800-500-3519 Fax. 310-900-1066
 www.gkradiance.com

Project :	
Model # :	
Item # :	Qty :
Available W/H :	
Approval :	

Salamander Broilers

Model : TASM-36

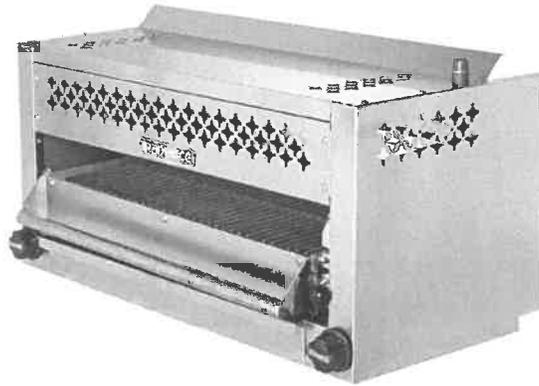

≡ FEATURES & BENEFITS ≡

- Adjustable gas valve
- Individual left and right gas controls
- Spring balanced grid
- 4 locking positions
- Rolling out grid for easy loading and unloading
- Removable grease pan for easy cleaning
- Can be mounted over Radiance range and can also be wall or counter mounted
- Stainless steel grid
- Stainless steel front, sides and interior
- CSA certified for safety / sanitation for USA and Canada



Model	Weight (lbs.)	Length (inches)	Total BTUs
TASM-36	210	36	35,000
TASM-36-LP	210	36	35,000

Ver.20190517

Salamander Broilers

Model : TASM-36

DATA	TASM-36	TASM-36-LP
Gas Type	NAT	LPG
Gas Connection	3/4"	3/4"
Regulator	1	1
Gas Pressure	5.W.C"	10.W.C"
BTU	35,000	35,000
DIMENSIONAL DATA		
Ext. Length Overall (inch)	36 (914mm)	36 (914mm)
Ext. Depth Overall (inch)	20 1/2 (519mm)	20 1/2 (519mm)
Ext. Height Overall (inch)	19 (483mm)	19 (483mm)
Weight (lbs.)	210	210

Design and specifications subject to change without notice.
Actual shipping weight may differ due to extra packing materials for product protection.

■ **WARRANTY : 1 Year Parts and Labor Warranty**


■ **Range mounting brackets standard**

■ **OPTIONAL ACCESSORIES**


- 36" wall mounting brackets: RCM1019
- Hood mount shelf to mount on 48" range: RCM1022
- Hood mount shelf to mount on 60" range: RCM1023

PLAN VIEW


(unit : inch)

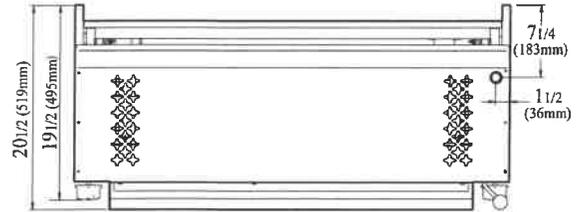

TOP VIEW

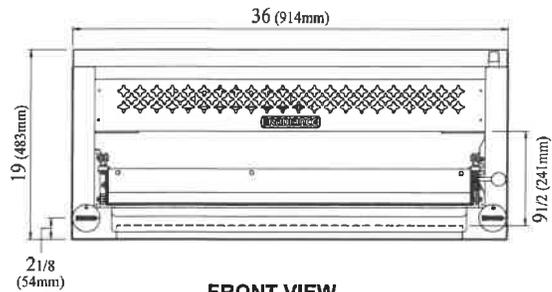

FRONT VIEW

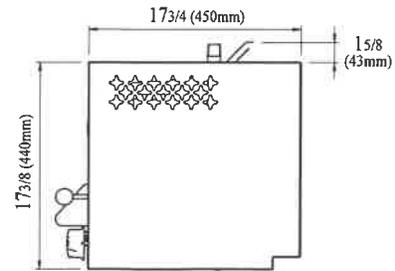

SIDE VIEW

Ver.20190517



- Turbo Air : 800-627-0032
- GK : 800-500-3519
- Warranty : 800-381-7770
- AC : 888-900-1002

