





Oronoco Dredging and Capping Project

Oronoco Street at Founders Park

Existing Conditions

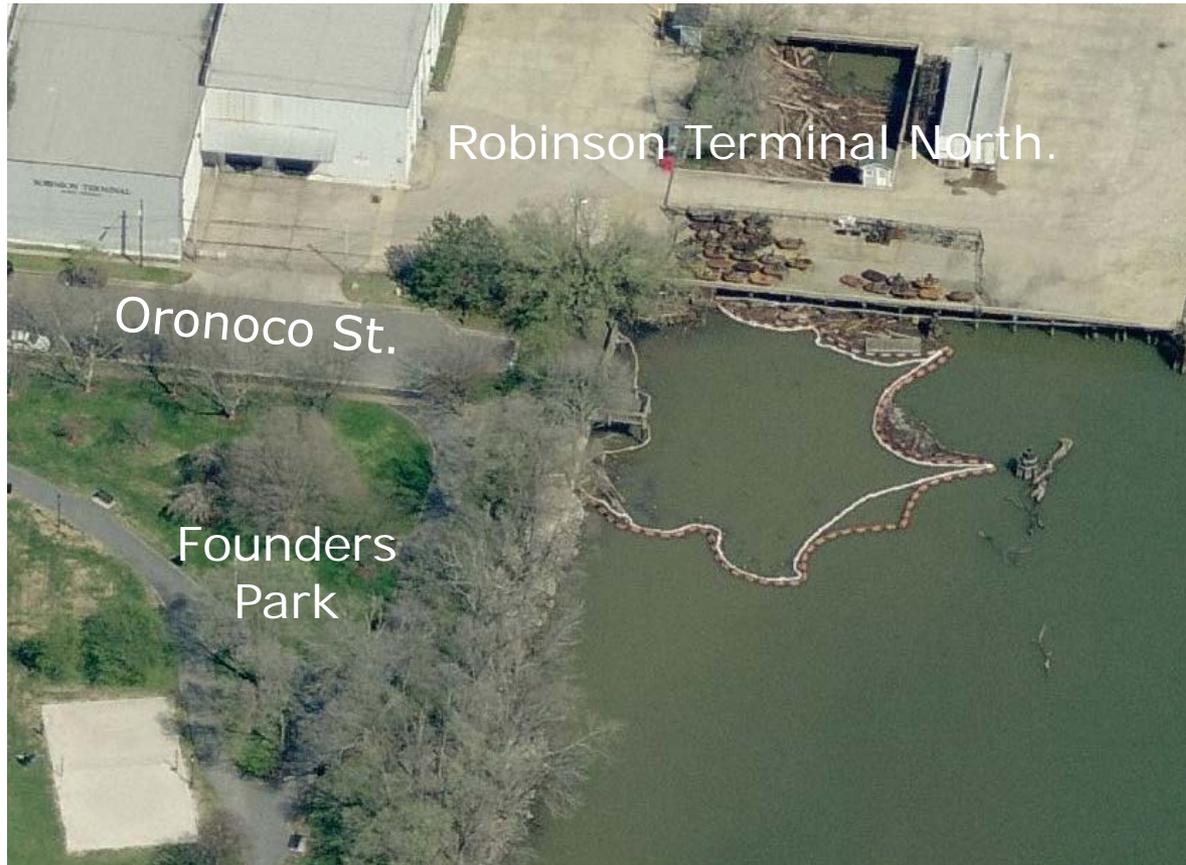

Scope of Work

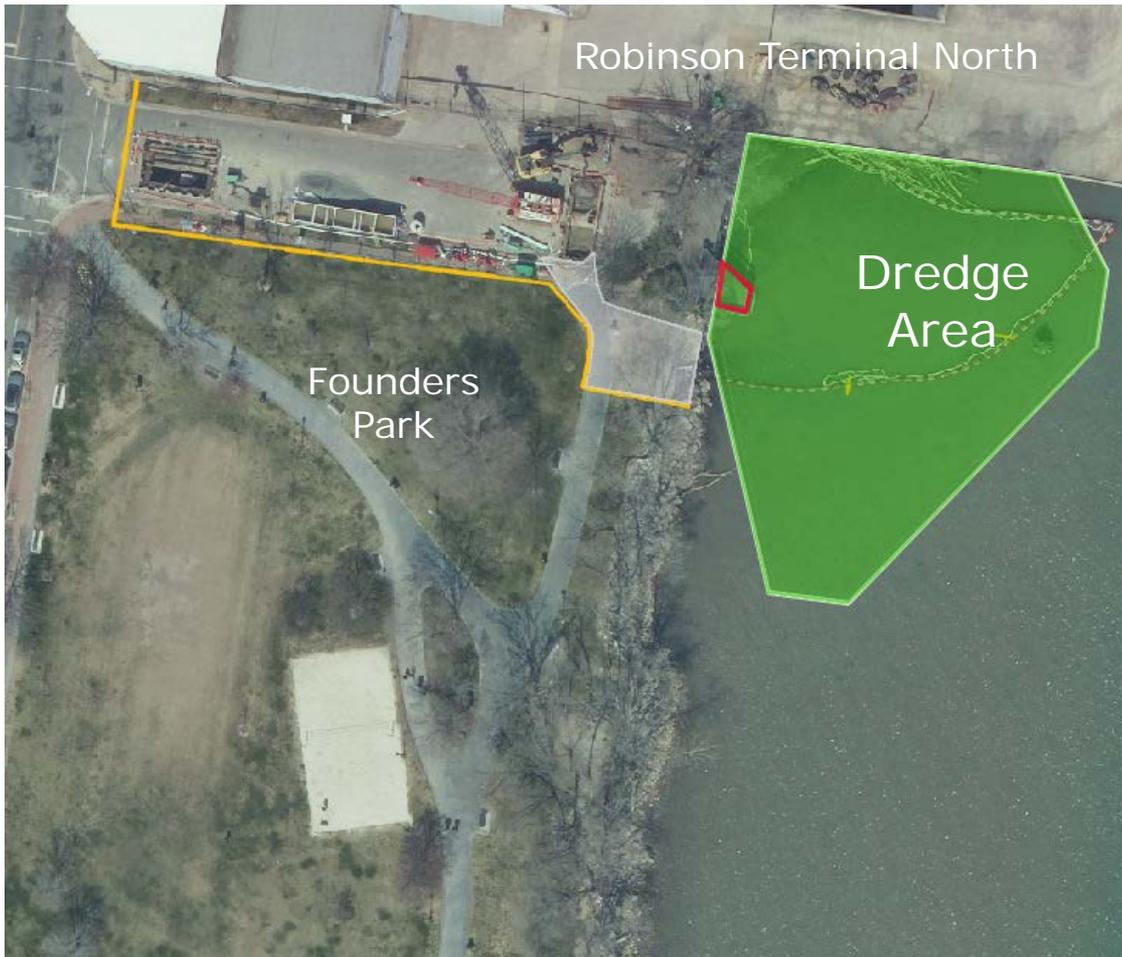

Oronoco Street closure

Founders Park 1800 sf fenced for access to water.

Removal of over water deck

Half acre of dredging
2000 cubic yards

Installation of reactive barrier and sealing cap.

Removal of containment boom

PROJECT SCHEDULE

- Advertise for construction
end of June 2015
- Start construction
end of October 2015
- End Construction
end of January 2016

Overhanging section of deck to be removed



River access from Oronoco Street



Capping Layer

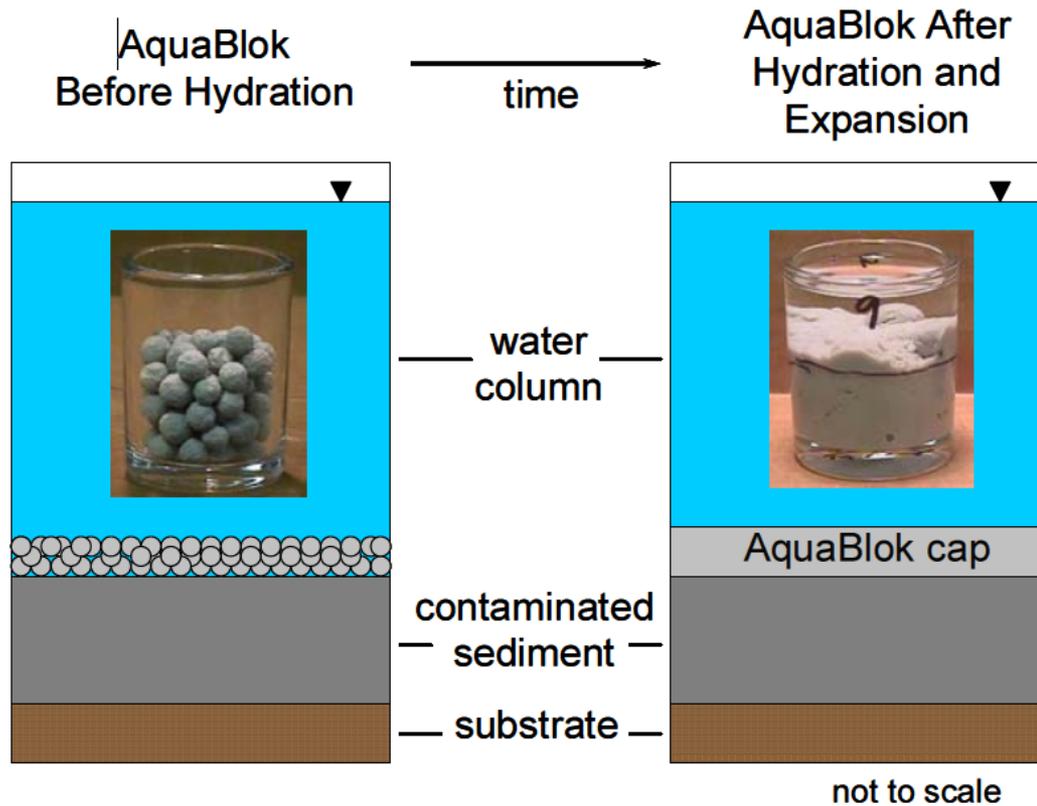


Figure 1-1. Integrated Conceptual and Actual View of AquaBlok® Capping Material
 (EPA Tech Trends, February 2000)

Project Location





PROJECT TEAM

- Owner: Transportation & Environmental Services
Khoa Tran 703-746-4076
- Project Manager: Project Implementation
David Fehr PE 703-746-4060
- Design Consultant: Cardno, Ashland, VA
Eric Powers PG 804-335-0612